INSTALLATION INSTRUCTIONS

FOR ITEM 268559 CASCADING BAR FIXTURE



CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

FIXTURE COMPONENTS

- 1. CANOPY ASSEMBLY
- 2. GLASS DROPS (QTY 40)

Caution:

Fixture is OVERWEIGHT and not suitable for installation with standard Junction Box.

Be sure power is off at the main breaker box prior to installation.

Read all instructions in their entirety before beginning installation.


- 1. Carefully unpack all components and make certain that everything is accounted for.
- 2. Remove Knobs from Canopy Assembly to release Mounting Plate. Reserve Knobs for later use.
- 3. Affix Mounting Plate to ceiling ensuring that connection is suitable to hold a minimum of 145lbs and that Electrical Supply Wires are accessible.
- 4. Following All Local Codes and Procedures, make connection from Lead Wires to Supply Wires.
- 5. Lift Canopy up to ceiling allowing Mounting Plate Studs to protrude through. Secure with reserved Knobs.
- 6. Screw Glass Drops into Aluminum fitters.
- 7. Power on and ENJOY!!!

2ND AVE

CUSTOMER PROPOSAL / CUT SHEET

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-843-1602
MONDAY - FRIDAY 8:00a.m - 6:00p.m ET
visit us on the web at www.2ndave.com

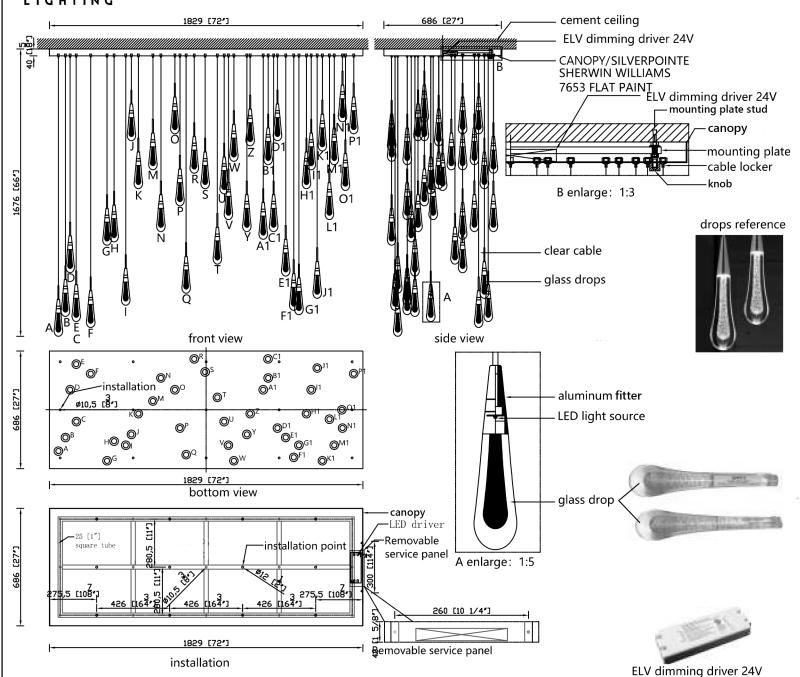



DIMENSIONS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION
©2NDAVE © DESIGN COPYRIGHT, 2NDAVE. ALL RIGHTS RESERVED, NO UNAUTHORIZED DUPLICATION

TEM # 206866-1500D-IMP(268559) W		WO # 7298778	BULB # 40 X INTEGRAL LED		DATE: 11/28/2023	
CUSTOMER DESIGN #		QUANTITY: 1	TYPE: 3000K LED		DRAWN BY: TM762	REVISION: 3
FIXTURE TYPE: CASCADING BAR FIXTURE			WATTAGE: 40	VOLTAGE: 120	SCALE: N.T.S.	
LENS COLOR: 206866-1500D-SMP-2 GLASS DROP SAMPLE (269412)			TOTAL AMPERAGE: 0.3		APPROVAL:	
metal finish: Silverpointe sherwin Williams 7653 flat			LOCATION: DAMP		ESTIMATED WEIGHT: 144 LBS	
MATERIAL: STEEL/GLASS			notes: elv phase dimmable		SHEET: 1 OF 1	
SLOPED CEILING: NO / YES	PITCH:					