

INSTALLATION INSTRUCTIONS

FOR ITEM 269305 LOXLEY GOLPE 24 LT CHANDELIER


CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

FIXTURE COMPONENTS

- | | |
|----------------------------|-----------------|
| A. CHANDELIER BODY | E. HUB W/ 1 ARM |
| B. IDALIGHT SHADE (QTY 24) | F. ARM (QTY 3) |
| C. CANOPY ASSEMBLY | |
| D. 60" CHAIN | |

Caution:
Fixture is OVERWEIGHT and not suitable to be hung from standard J-BOX.
Be sure power is off at the main breaker box prior to installation.
Read all instructions in their entirety before beginning installation.

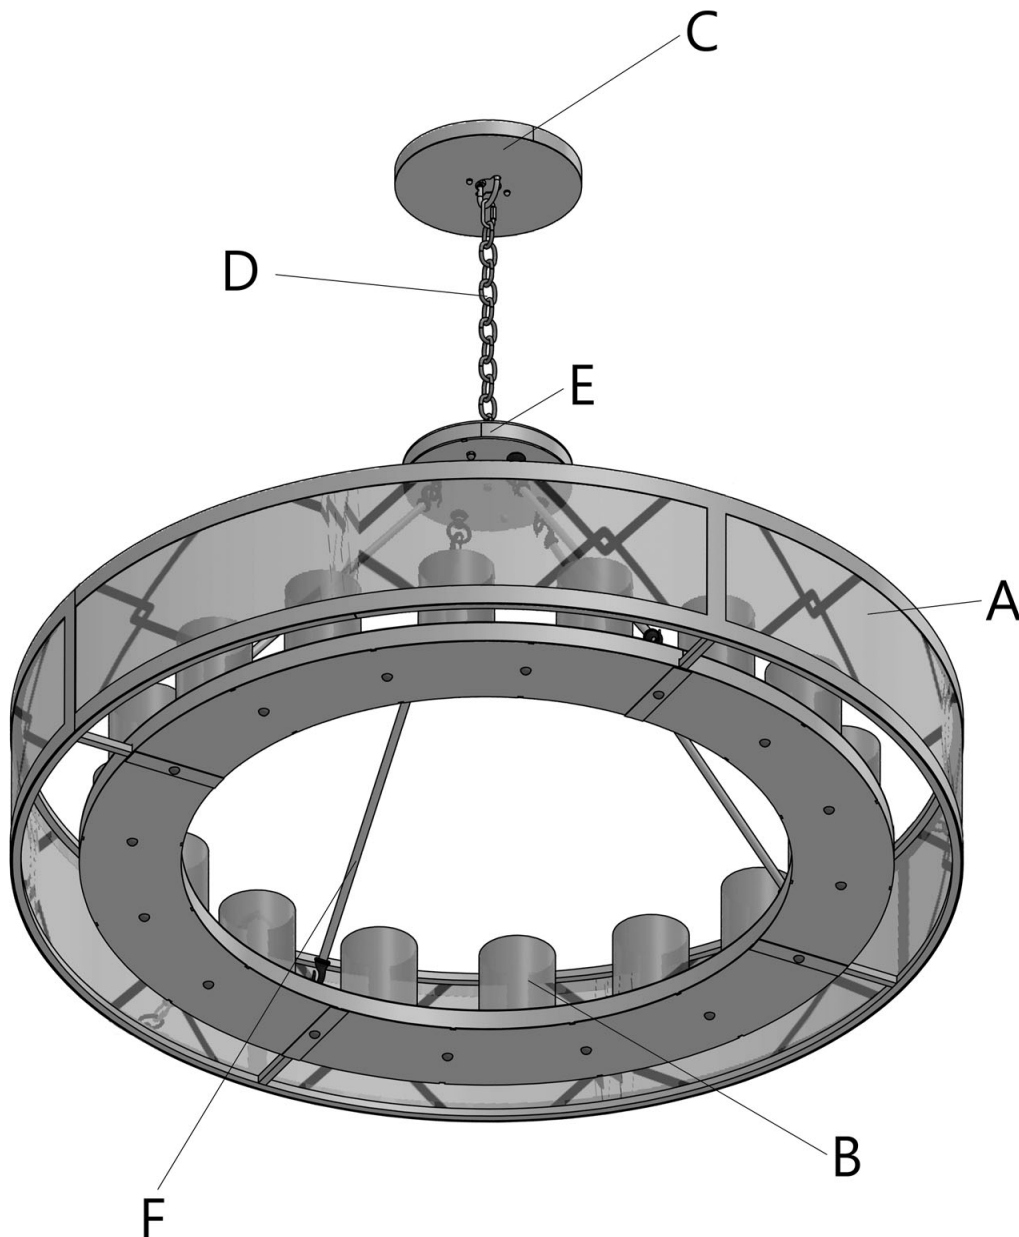

INSTALLATION INSTRUCTIONS

FOR ITEM 269305 LOXLEY GOLPE 24 LT CHANDELIER

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Caution:
Fixture is OVERWEIGHT and not suitable to be hung from standard J-BOX.
Be sure power is off at the main breaker box prior to installation.
Read all instructions in their entirety before beginning installation.

1. Carefully unpack all components and make certain that everything is accounted for.
2. Remove Acorn Nuts from Canopy Assembly to release Mounting Plate. Reserve Nuts for later use.
3. Affix Mounting Plate to ceiling ensuring that connection is suitable for minimum 150lbs and that electrical Supply Wires remain accessible.
4. Attach desired length of Chain to Quick Link on Hub.
5. Weave Fixture Lead Wire through every 3rd Link of Chain.
6. Feed Lead Wire through central opening in Canopy and allow Canopy to rest on Hub.
7. Attach loose end of Chain to Quick Link on Mounting Plate.
8. Following all Local Codes and Procedures, make electrical connection from Fixture Lead Wires to Supply Wires
9. Slide Canopy up Chain and over Mounting Plate Loop and Studs and secure with Reserved Acorn Nuts.
10. Hang Arms from vacant Loops on Hub.
11. Attach Arms to Loops on Chandelier Body. Be certain to align Powered Arm to Loop on Chandelier Body with Power Receptacle and make connection.
12. Install 24-E26 60Watt Bulbs(not included) into Sockets.
13. Place Shades into Shade Wells on Pendant Body.
14. Power on and ENJOY!!!

