INSTALLATION INSTRUCTIONS

FOR ITEM 275513 (QPH1-17.5-94 & SG696-05R-5)



CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL

INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

FIXTURE COMPONENTS


- 1. CANOPY & LAMP STEM
- 2. SG696-05R-5

Caution:

Be sure power is off at the main breaker box prior to installation. Read all instructions in their entirety before beginning installation.

CROSSBAR W/STUDS-

- 1. Carefully unpack all components and make certain that everything is on hand.
- 2. Release crossbar from Canopy by unscrewing the two Brass knobs on the Canopy.
- 3. Using customer supplied hardware, affix crossbar directly to J-box ensuring that connection is suitable for a minimum of 10 lbs and that electrical supply wires remain accessible.
- 4. Unravel the lead wires from the Canopy and lift fixture up to ceiling.
- 5. Following all local codes and procedures, make electrical connection from supply wires to fixture lead wires.
- 6. Carefully insert the studs back into the Canopy and secure using the Bass knobs from earlier.
- 7. Secure SG696-05R-5 Shade with Cork washer & Uno ring.
- 8. Install 1X 15WATT max E26 A19 Bulb (not included) into socket.
- 9. Power on and ENJOY!!!

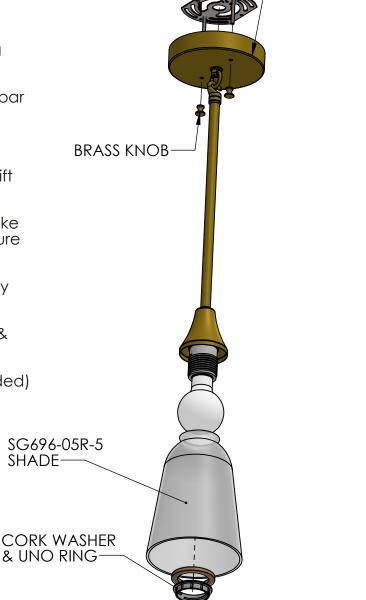

MEYDA.COM 1.800,222,4009 SALES@MEYDA.COM

CANOPY