INSTALLATION INSTRUCTIONS

FOR ITEM 281640 17" SQ. RECESSED CEILING FIXTURE



CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

FIXTURE COMPONENTS

- 1. TOP COVER
- 2. FRAME BOX
- 3. LENS RING

Caution:

Fixture is OVERWEIGHT and not suitable for installation with standard Junction Box.

Be sure power is off at the main breaker box prior to installation.

Read all instructions in their entirety before beginning installation.


- 1. Carefully unpack all components and make certain that everything is accounted for.
- 2. Hang fixture on cables using cable brackets. Cables not supplied.
- 3. Feed Supply Wires through romex clamp attached to
- \emptyset 7/8" hole in Frame Box and following all Local Codes and

Procedures make electrical connection to Led Driver Lead wire.

Unscrew Top Cover from Frame Box if nessesery for wiring.

- 4. Install lens ring on place.
- 5. Power on and FNJOY!!!

Ø7/8 HOLE FOR ROMEX CLAMP CONNECTOR (NOT SUPPLIED)

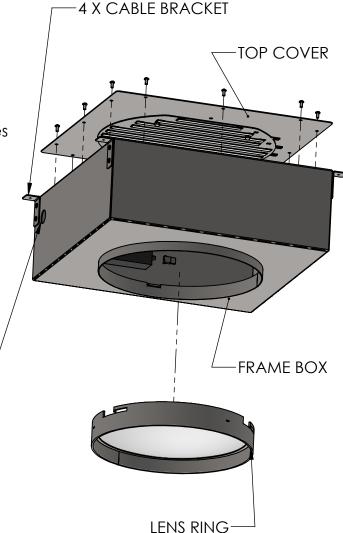

MEYDA.COM 1.800,222,4009 SALES@MEYDA.COM