

# INSTALLATION INSTRUCTIONS

FOR ITEM 281914



**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

**Caution:** Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

## FIXTURE COMPONENTS

1. RING ASSEMBLY
2. SIGN ASSEMBLY

### ***Caution:***

***Fixture is OVERWEIGHT and not suitable for installation with standard Junction Box.***

***Be sure power is off at the main breaker box prior to installation.***

***Read all instructions in their entirety before beginning installation.***

1. Carefully unpack all components and make certain that everything is on hand.
2. With the sign laying down unscrew the phillips head screws holding the two panels on the back of the sign
3. Push supply wires through the 7/8" hole in the bottom of the sign.
4. With at least three people lift sign assembly and place on platform. Ensure that the platform can support a minimum of 330 lbs.
5. Following all local codes and procedures, make electrical connections from LED driver wires to supply wires. All drivers in the box are connected to a single cable inside the sign on the bottom.
6. Get the ring assembly and remove the hex nut, split washer and flat washer from the mounting bolts on the ring base, save these for later.
7. With at least three people carefully lift ring, making sure not to twist the frame.
8. Insert the wires from the base of the rings into the larger center holes on the top of the sign, then lining up rings bases with the bolt holes on top of the sign.
9. Using the previously saved hardware secure the rings to the sign.
10. Inside the sign connect the ring using the molex connectors on the end of the lead from the ring to the LED drivers located inside the sign, on the top.
11. If desired, the rings and sign may be dimmed by connecting dimming wires from the driver to a 0-10V dimming switch
12. Power on and ENJOY!




# CUSTOMER PROPOSAL / CUT SHEET

"A Commitment to Excellence in Lighting and Service"


CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009  
 MONDAY - FRIDAY 9:00a.m - 5:00p.m ET  
 visit us on the web at [www.meyda.com](http://www.meyda.com)

REVISION:

## 1. RING ASSEMBLY

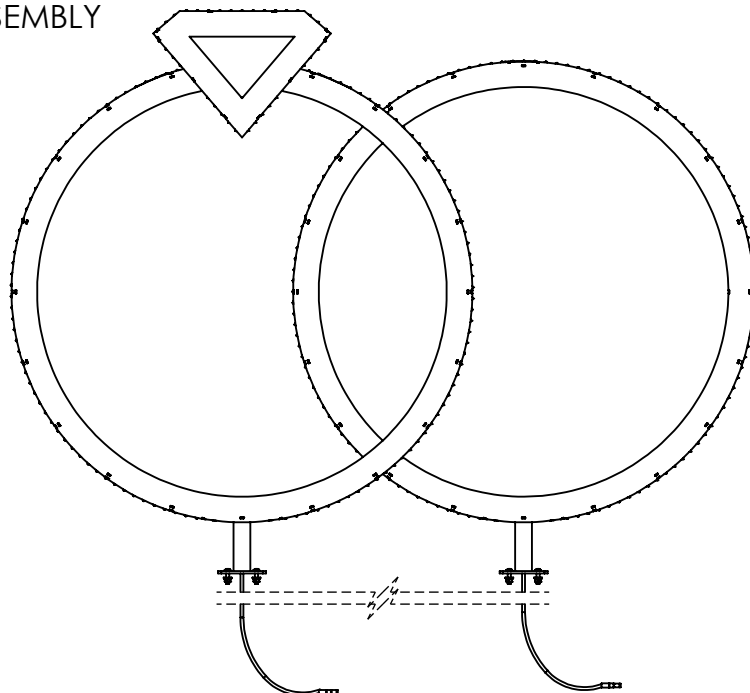

## 2. SIGN ASSEMBLY

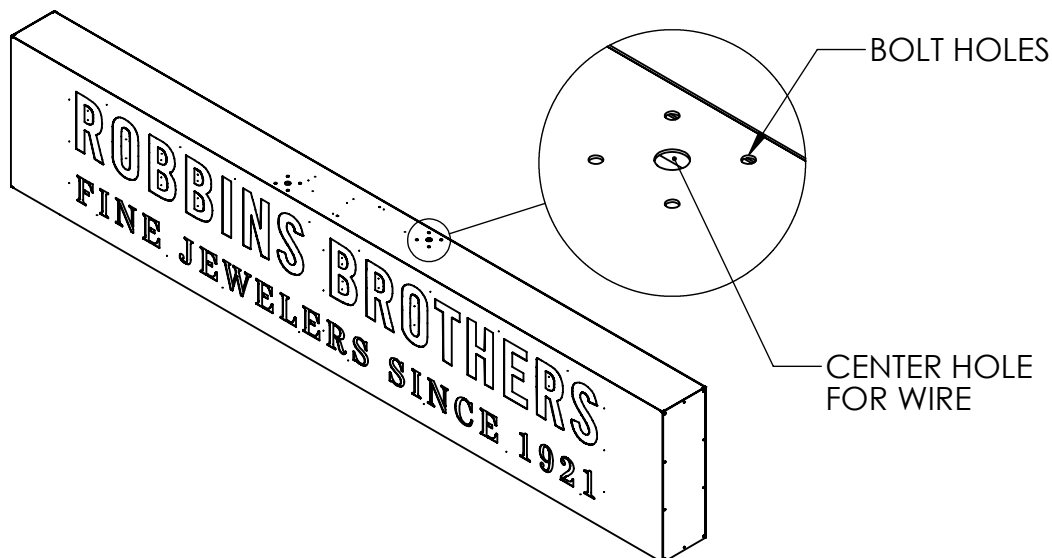

\*DIMENSIONS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION  
 © MEYDA TIFFANY INC © DESIGN COPYRIGHT, MEYDA TIFFANY, INC. ALL RIGHTS RESERVED, NO UNAUTHORIZED DUPLICATION

\*TRANSPARENT FINISHES WILL VARY DEPENDING ON THE MATERIAL TO WHICH IT IS APPLIED AND THE FABRICATION TECHNIQUE.



ID# 66741-1672(281914)	W/O# 1514300	BULB# INTEGRAL LED (BULBS NOT INCLUDED)	DATE:9/30/2025
CUST. DESIGN#	QTY: 2	TYPE: INTEGRAL LED STRIP 3500K	DRAWN BY:MZ 985
FIXTURE TYPE: CHANDELIER	WATTS:127.13	VOLTAGE:120	SCALE: 1:32
LENS COLOR:Crystal/125724 STATUARIO IDALIGHT(NOT FROSTED)	TOTAL AMPS: 1.173167	APPROVAL:	
METAL FINISH:3TSB-A TRANSLUCENT DARK STARBURST BRASS (280864)	LOCATION: DAMP	EST. WEIGHT:302.20 LBS	
MATERIAL:STEEL/ CRYSTAL/ ACRYLIC	NOTES:0-10V DIMMABLE	SHEET: 2 OF 2	