FOR ITEM 284141



## CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL

**INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

*Caution:* Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.


#### FIXTURE COMPONENTS

- 1. CROSSBAR W/ STUDS
- 2. SHADE
- 3. CANOPY ATTACHED TO LAMPING
- 4. GLASS PANELS


### Caution:

## *Be sure power is off at the main breaker box prior to installation. Read all instructions in their entirety before beginning installation.*

- 1. Carefully unpack all components and make certain that everything is on hand.
- 2. Unscrew the large steel ball at the bottom of the shade to seperate the shade and the canopy with the lamping assembly.
- 3. Remove the crossbar from the canopy by unscrewing the brass balls on the bottom of the canopy. (save for later)
- 4. Using customer supplied hardware, affix the crossbar to the J-box ensuring the connection is sutiable for a minimum of 15 lbs and that electrical supply wires remain accessible.
- 5. Unravel the wire at the top of the canopy and lift the canopy with the lamping assembly attached up to the ceiling.
- 6. Following all local codes and procedures, make electrical connection from supply wires to lead wires.
- 7. Mount the canopy back onto the crossbar aligning the studs with the holes in the canopy and fixing the canopy in place by screwing in the brass balls from earlier.
- 8. Unscrew the hex nuts inside of the shade to remove the mica clips.
- 9. Carefully insert the glass into the shade and loosely fit the mica clips and hex nuts back onto the studs.
- 10. Repeat until all glass is in and then tighten the hex nuts to secure glass. (DO NOT OVER TIGHTEN)
- 11. Install 2X 60WATT E26 A19 Bulbs (not included) into sockets.
- 12. Lift shade up to ceiling, securing it using the large steel ball from earlier to the canopy assembly.
- 13. Power on and ENJOY!!!

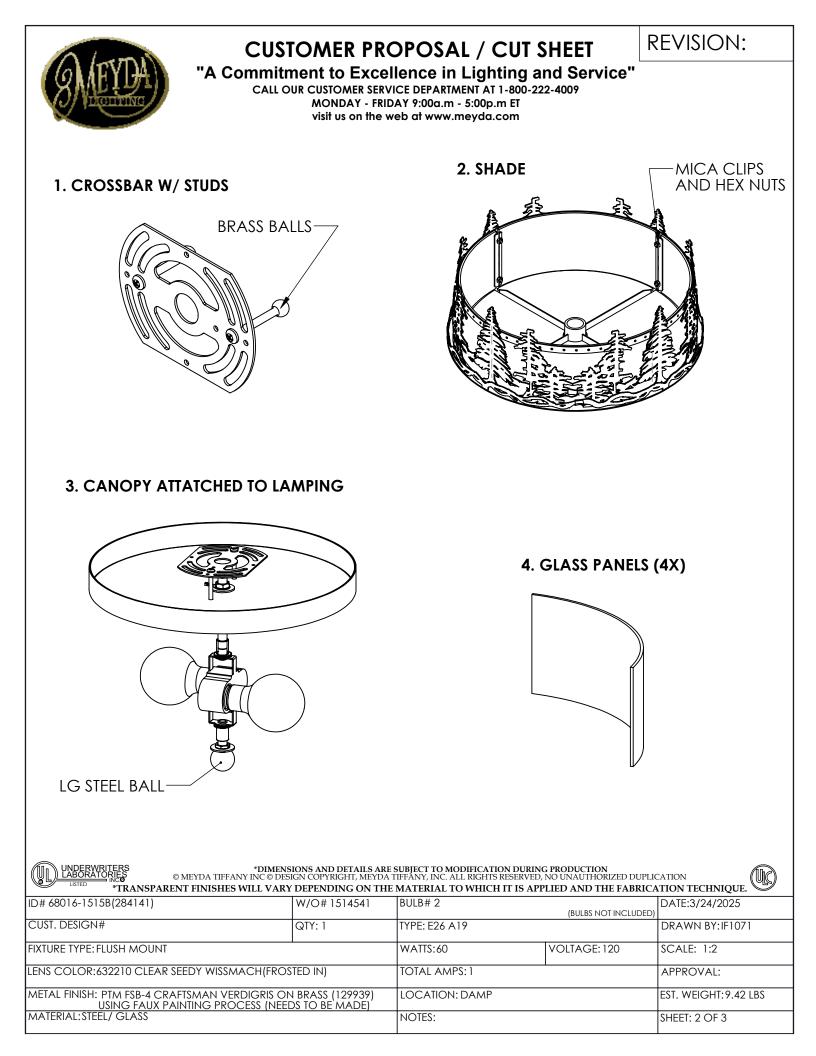

UNDERWRITERS IMAGENTIALS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION IMAGENTIALS OF METAILS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION IMAGENTIALS OF METAILS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION IMAGENTIALS OF METAILS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION IMAGENTIALS OF METAILS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION IMAGENTIALS OF METAILS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION IMAGENTIALS OF METAILS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION IMAGENTIALS OF METAILS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION IMAGENTIALS OF METAILS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION IMAGENTIALS OF METAILS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION IMAGENTIALS OF METAILS AND AND THE MATERIAL TO WHICH IT IS APPLIED AND THE FABRICATION TECHNIQUE.				
ID# 68016-1515B(284141)	W/O# 1514541	BULB# 2	(BULBS NOT INCLUDED	DATE:3/24/2025
CUST. DESIGN#	QTY: 1	TYPE: E26 A19		DRAWN BY:IF1071
FIXTURE TYPE: FLUSH MOUNT		WATTS:60	VOLTAGE: 120	SCALE: 1:4
LENS COLOR:632210 CLEAR SEEDY WISSMACH(FROSTED IN)		TOTAL AMPS: 1		APPROVAL:
METAL FINISH: PTM FSB-4 CRAFTSMAN VERDIGRIS ON BRASS (129939) USING FAUX PAINTING PROCESS (NEEDS TO BE MADE)		LOCATION: DAMP		EST. WEIGHT: 9.42 LBS
MATERIAL:STEEL/ GLASS		NOTES:		SHEET: 3 OF 3

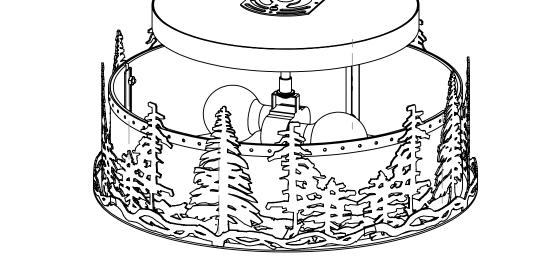





# CUSTOMER PROPOSAL / CUT SHEET

"A Commitment to Excellence in Lighting and Service" CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009 MONDAY - FRIDAY 9:00a.m - 5:00p.m ET visit us on the web at www.meyda.com **REVISION:**