

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL

INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

FIXTURE COMPONENTS


CANOPY ASSEMBLY 1.

4. ACRYLIC BOWL

- 2. FRAME 3.
- 4 X ARMS

Caution: Be sure power is off at the main breaker box prior to installation. Read all instructions in their entirety before beginning installation.

- Carefully unpack all components and make certain that 1. everything is on hand.
- Remove the Crossbar by uncrewing Brass Balls on the bottom of the Canopy. (save for later) 2.
- 3. Using Customer Supplied Hardware, affix Crossbar to Jbox ensuring that connection is suitable for a minimum of 35lbs and that Electrical Supply Wires remain accessible.
- Unravel Lead Wires from the top of the Canopy and lift up 4. to ceiling.
- Following all Local Codes and Procedures, make 5. Electrical Connections from Fixture Lead Wires to Supply Wires.
- Attach Canopy to Crossbar using attached studs and 6. Brass Balls from earlier.
- 7. Install 4X 60WATT E26 A19 Bulbs (not included) into sockets.
- 8. Hook the Arms into the rings on the Canopy
- 9. Lift Frame with Acrylic Bowl up to ceiling, hook arms into rinsg on the Frame.
- 10. Power on and ENJOY!!!

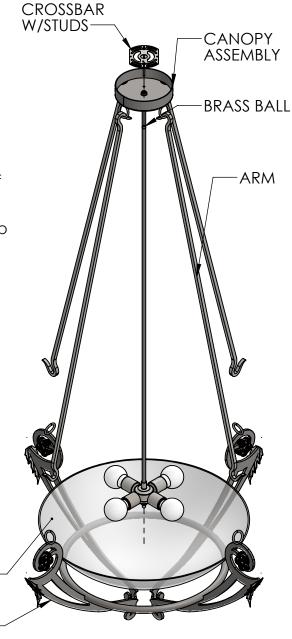

ACRYLIC BOWL

FRAME