

INSTALLATION INSTRUCTIONS

FOR ITEM 288173



CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Fixture Components

1. CANOPY W/HARDWARE
2. FRAME (INCLUDES 120"W, 84"W, 48"W)
3. AIRCRAFT CABLES
4. SHADE (X36)
5. SHADE STUDS

Caution:

Fixture is OVERWEIGHT and not suitable for installation with standard Junction Box.

Be sure power is off at the main breaker box prior to installation.

Read all instructions in their entirety before beginning installation.

1. Carefully unpack all components and make certain that everything is on hand.
2. Remove Acorn and Hex Nuts from Canopy to release Mounting Plate. Reserve Nuts for later use.
3. Secure the Mounting Plate to the ceiling ensuring that the connection is suitable to hold a minimum of 250 lbs and the electrical supply wires are accessible.
4. Place Canopy Plate back over the Mounting Plate and secure using the reserved Nuts.
5. Unscrew the Knurled Cap at center of Canopy to release the Wiring Access Panel and expose Supply Wires. Wiring connections will be made outside of Canopy.
6. Hang the 120"W Frame by feeding outer most Aircraft Cables from the Canopy through Cable Grippers on the Frame. Pass the cable adjacent to the Frame Power Wire through 6 O-rings.
7. Run the Power Wire from 120"W Frame through the O-Rings to the outer most strain relief in the Canopy and out of the Wiring Access Panel.
8. Use same steps for other two frames (84"W & 48"W).
9. Following all local codes and procedures, make electrical connections from lead wire to supply wires. Push wire connections into Canopy and replace Wiring Access Panel. Secure with Knurled Cap.
10. Install E26 A19 (15W LED) bulbs in the socket
11. Lift Shades over Sockets and secure them by passing Studs through Shades and threading them into Socket Couplings.
12. Power ON and ENJOY!!



INSTALLATION INSTRUCTIONS


"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 9:00a.m - 5:00p.m ET

visit us on the web at www.meyda.com

REVISION:

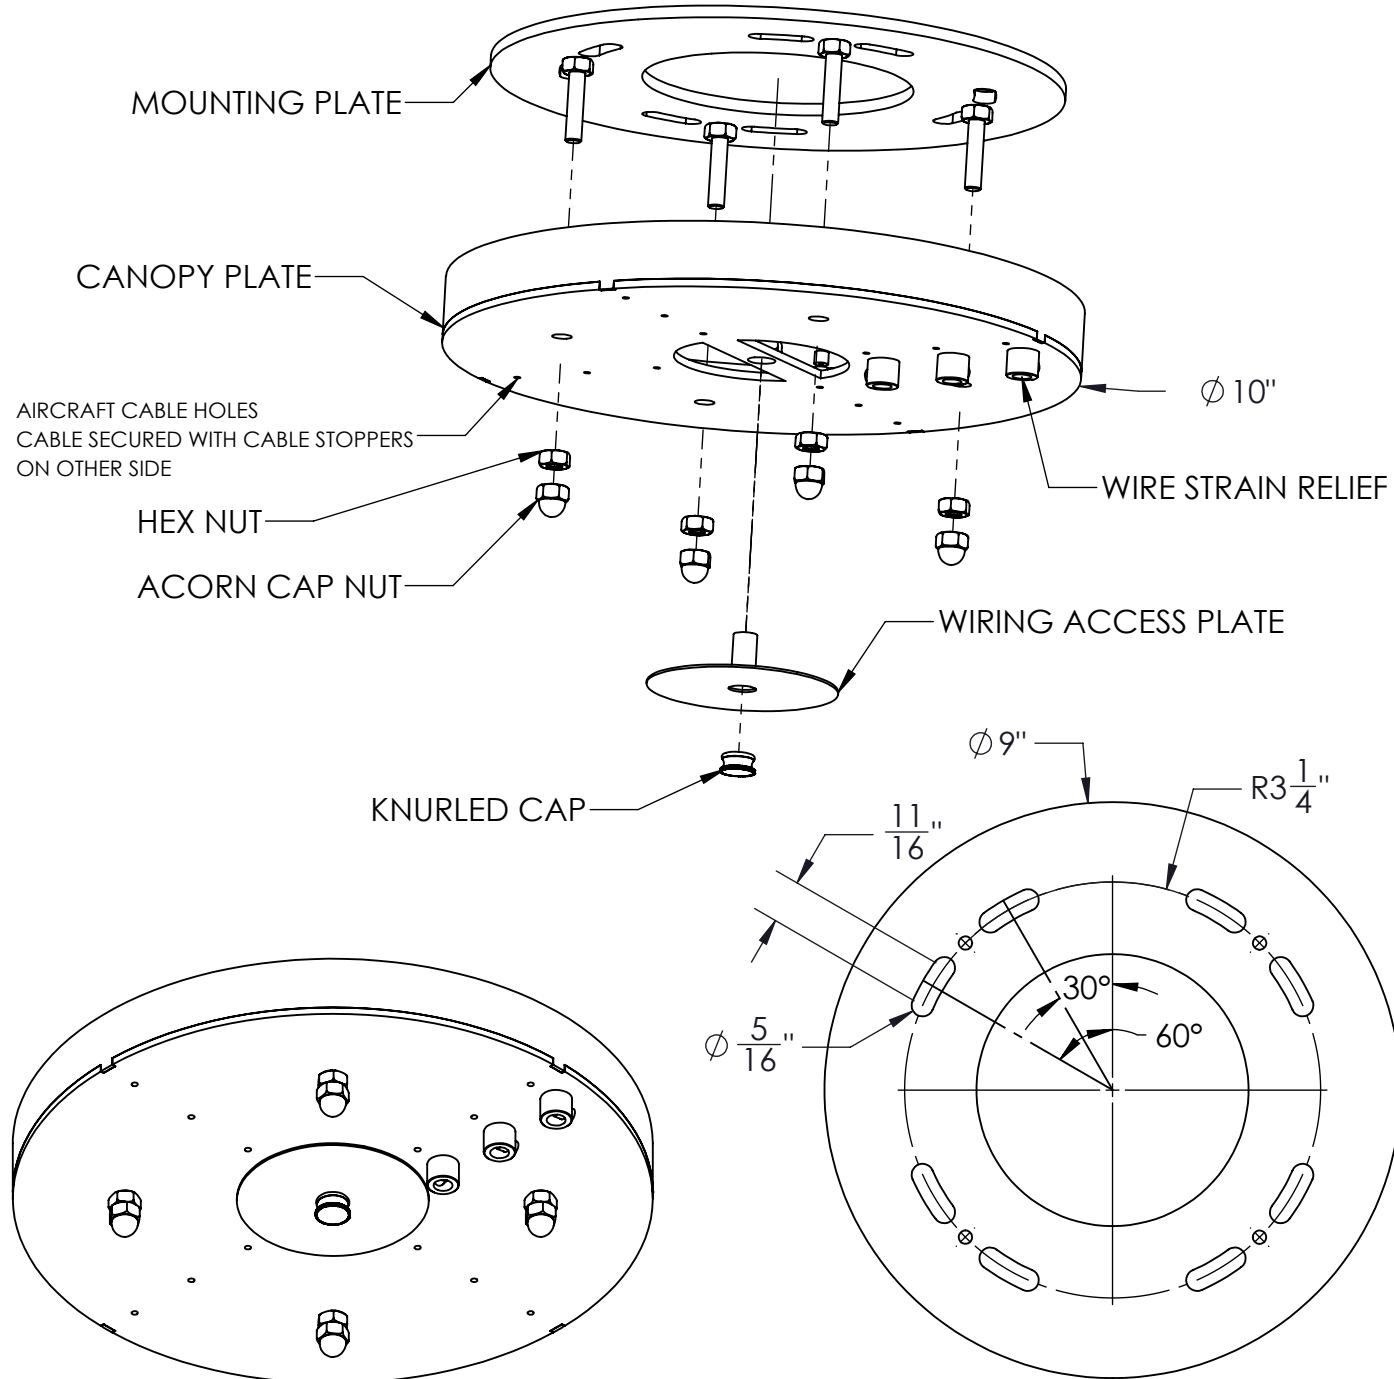

CANOPY W/MOUNTING PLATE ASSEMBLY

MOUNTING PLATE LAYOUT



*DIMENSIONS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION
© MEYDA TIFFANY INC © DESIGN COPYRIGHT, MEYDA TIFFANY, INC. ALL RIGHTS RESERVED, NO UNAUTHORIZED DUPLICATION
*TRANSPARENT FINISHES WILL VARY DEPENDING ON THE MATERIAL TO WHICH IT IS APPLIED AND THE FABRICATION TECHNIQUE.



ID# 62275-1521A(288173)	BULB# 36 (BULBS NOT INCLUDED)	DATE:11/21/2025
CUST. DESIGN#	TYPE: E26 A19 LED	DRAWN BY:TP1063
Fixture Type: CHANDELIER	WATTS:15	VOLTAGE: 120
LENS COLOR: --305324 (6"W CYLINDER WHITE GLASS)	TOTAL AMPS: 4.5	APPROVAL:
METAL FINISH: 3SLRBLK SOLAR BLACK (106404)	LOCATION: DAMP	EST. WEIGHT:
MATERIAL: STEEL/ GLASS	NOTES:	SHEET: 2 OF 4



INSTALLATION INSTRUCTIONS

REVISION:

"A Commitment to Excellence in Lighting and Service"


CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 9:00a.m - 5:00p.m ET

visit us on the web at www.meyda.com

FRAME DETAILS

CABLE GRIPPERS
INSTALLED ON FRAME

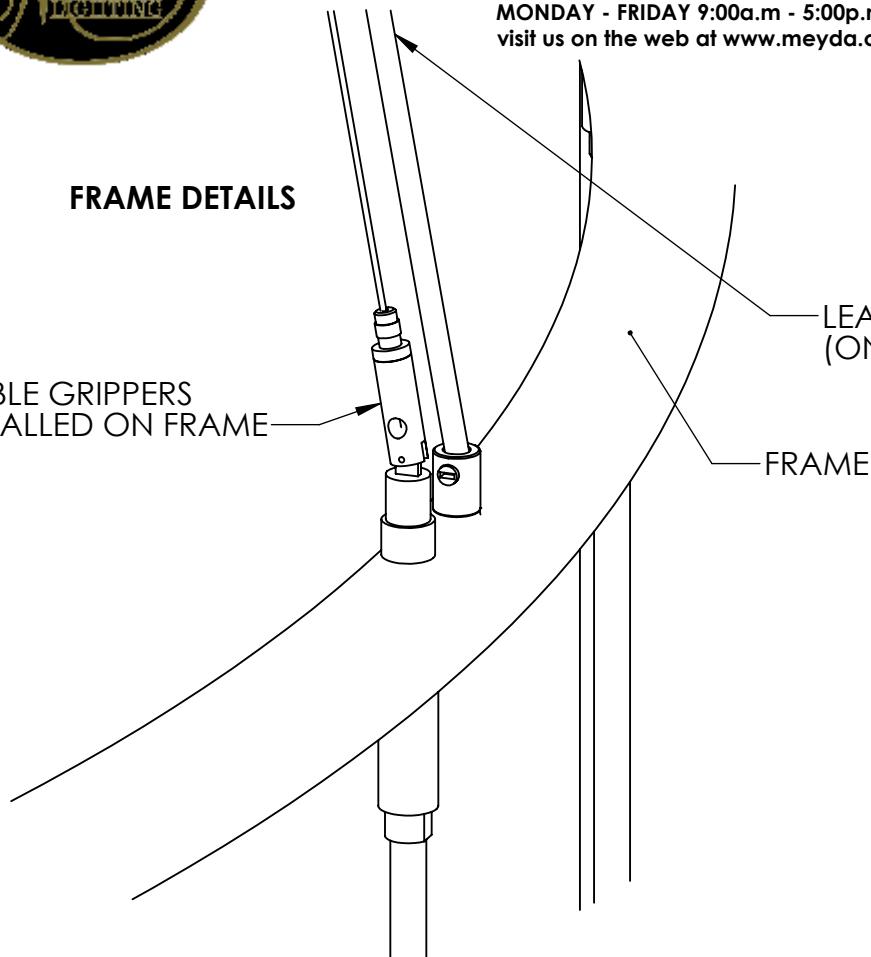

LEAD WIRE
(ONE FOR EACH DIAMETER FRAME)

FRAME

CANOPY DETAILS

CANOPY PLATE

WIRE ACCESS

AIRCRAFT CABLES
GOING IN CANOPY

METAL STRAIN
RELIEF INSTALLED
IN CANOPY



*DIMENSIONS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION
© MEYDA TIFFANY INC © DESIGN COPYRIGHT, MEYDA TIFFANY, INC. ALL RIGHTS RESERVED, NO UNAUTHORIZED DUPLICATION

*TRANSPARENT FINISHES WILL VARY DEPENDING ON THE MATERIAL TO WHICH IT IS APPLIED AND THE FABRICATION TECHNIQUE.



ID# 62275-1521A(288173)	BULB# 36 (BULBS NOT INCLUDED)	DATE:11/21/2025
CUST. DESIGN#	TYPE: E26 A19 LED	DRAWN BY:TP1063
Fixture Type: CHANDELIER	WATTS:15	VOLTAGE: 120
LENS COLOR: --305324 (6"W CYLINDER WHITE GLASS)	TOTAL AMPS: 4.5	APPROVAL:
METAL FINISH: 3SLRBLK SOLAR BLACK (106404)	LOCATION: DAMP	EST. WEIGHT:
MATERIAL: STEEL/ GLASS	NOTES:	SHEET: 3 OF 4



INSTALLATION INSTRUCTIONS


REVISION:

"A Commitment to Excellence in Lighting and Service"


CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 9:00a.m - 5:00p.m ET

visit us on the web at www.meyda.com

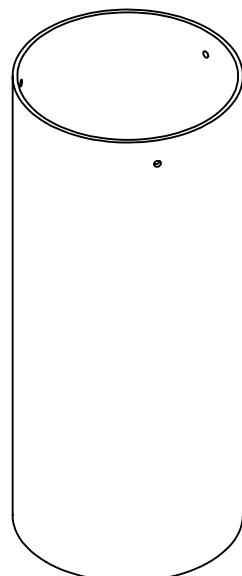

SHADES

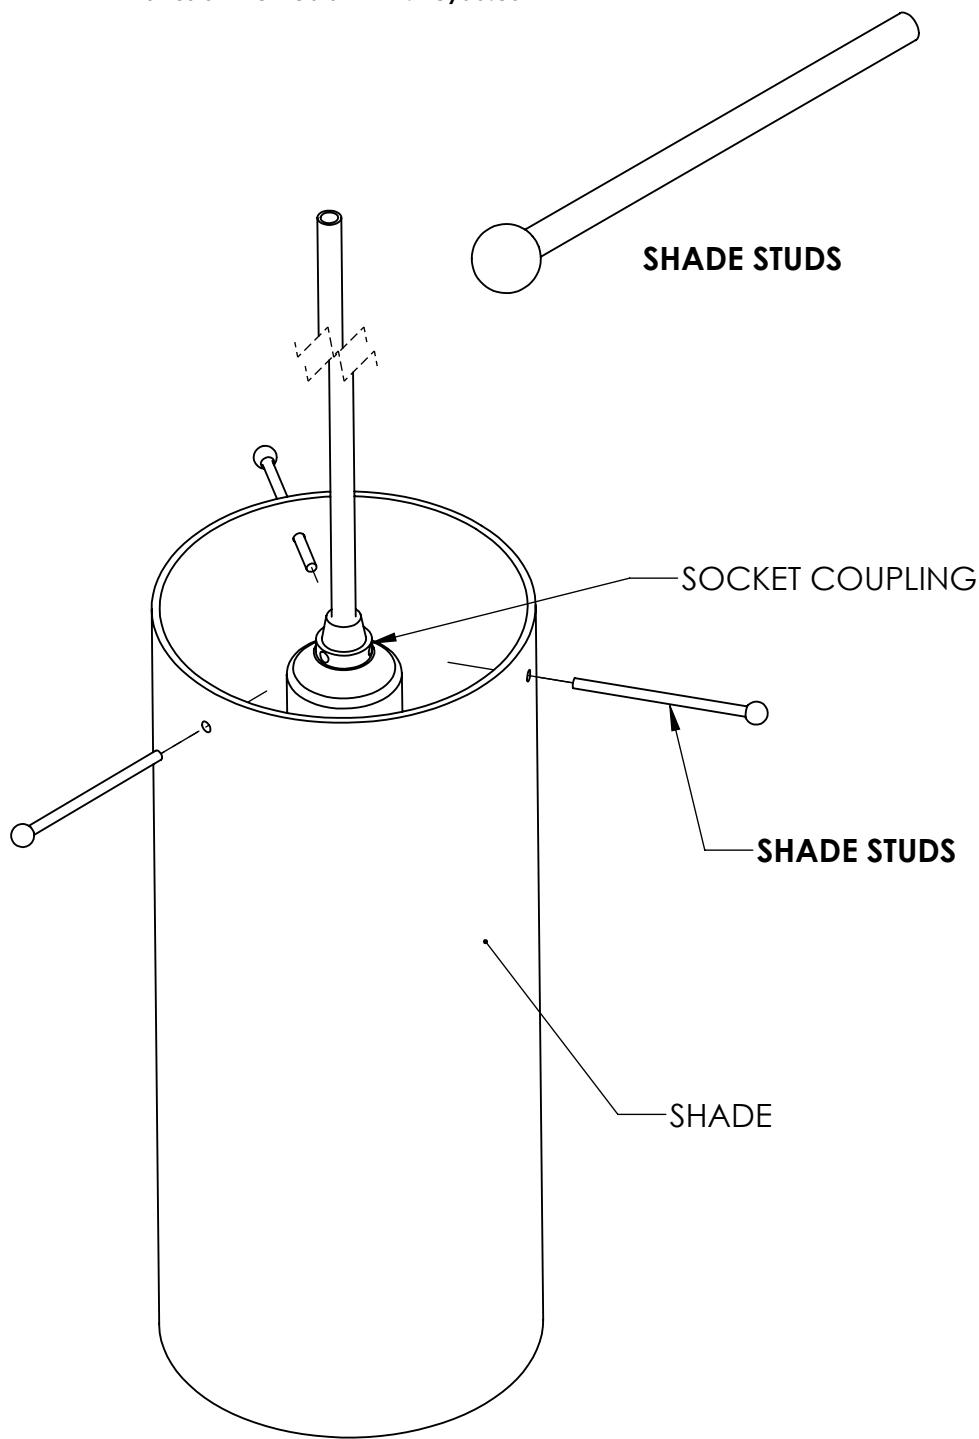

*DIMENSIONS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION
© MEYDA TIFFANY INC © DESIGN COPYRIGHT, MEYDA TIFFANY, INC. ALL RIGHTS RESERVED, NO UNAUTHORIZED DUPLICATION

*TRANSPARENT FINISHES WILL VARY DEPENDING ON THE MATERIAL TO WHICH IT IS APPLIED AND THE FABRICATION TECHNIQUE.



ID# 62275-1521A(288173)	BULB# 36 (BULBS NOT INCLUDED)	DATE:11/21/2025
CUST. DESIGN#	TYPE: E26 A19 LED	DRAWN BY:TP1063
FIXTURE TYPE: CHANDELIER	WATTS:15	VOLTAGE: 120
LENS COLOR: -305324 (6"W CYLINDER WHITE GLASS)	TOTAL AMPS: 4.5	APPROVAL:
METAL FINISH: 3SLRBLK SOLAR BLACK (106404)	LOCATION: DAMP	EST. WEIGHT:
MATERIAL: STEEL/ GLASS	NOTES:	SHEET: 4 OF 4