

INSTALLATION INSTRUCTIONS

FOR ITEM 70722



CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

FIXTURE COMPONENTS

1. CANOPY WITH CROSSBAR
2. CHAIN WITH QUICK LINKS
3. HUB
4. ARMS AND SHADE RING
5. ACRYLIC SHADE

Caution:

***Be sure power is off at the main breaker box prior to installation.
Read all instructions in their entirety before beginning installation.***

1. Carefully unpack all components and make certain that everything is on hand.
2. Unscrew Collar on end of Loop attached to Canopy to release the Canopy from Crossbar.
3. Using Customer Supplied Hardware, affix Crossbar directly to J-Box ensuring connections is suitable for a minimum of 35 lbs and that electrical supply wires remain accessible.
4. Connect Chain between Hub and Canopy Loops using Quick Links provided. (put Canopy and Collar through Chain before connecting to Hub and let hang loose)
5. Unravel Wire from the top of the Hub and feed through Chain, weaving between every 4 links and up through the loop until wire is up to the Crossbar.
6. Following all local codes and procedures, make wire connections from supply wires to lead wires.
7. Lift Canopy up Chain to ceiling and tighten in place using Collar on Loop.
8. Attatch Arms to Hub using the hook end of Arms and let hang loose.
9. Lift Shade Ring up and secure on each Arm using attached Hooks.
10. Carefully lift Acrylic Shade up through the ring and secure in place by screwing in provided Screws with Washers inside of the Shade.
11. Install 4X 60 WATT E26 A19 Bulbs (not included) into Sockets.
12. Power on and ENJOY!!!



CUSTOMER PROPOSAL / CUT SHEET

"A Commitment to Excellence in Lighting and Service"


CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 9:00a.m - 5:00p.m ET


visit us on the web at www.meyda.com

REVISION:

1. CANOPY WITH CROSSBAR

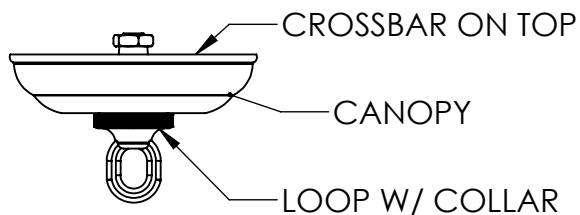


2. CHAIN AND QUICK LINKS

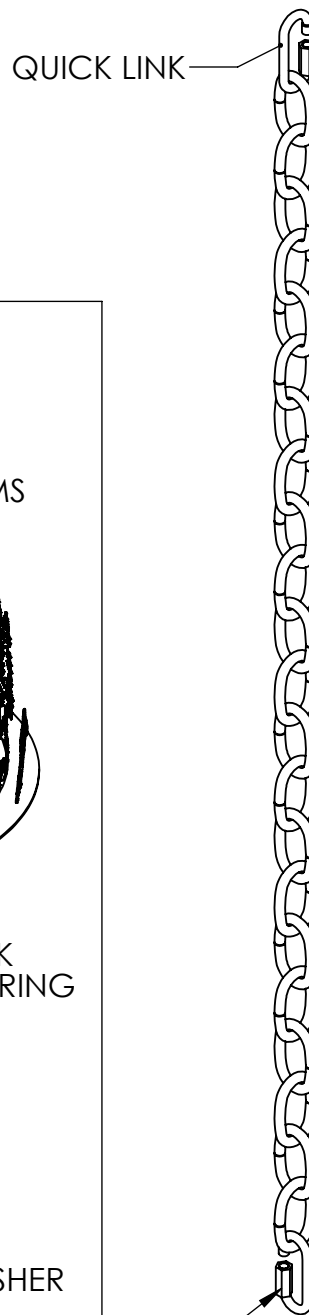


3. HUB

LOOP FOR QUICK LINK

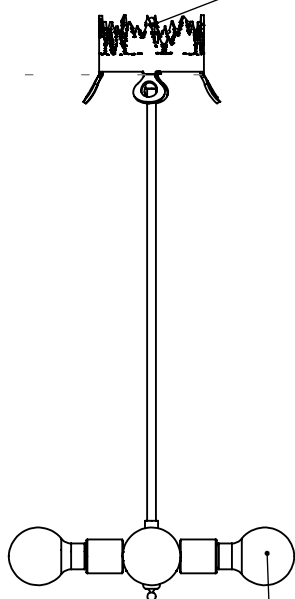

4. SHADE RING AND ARMS

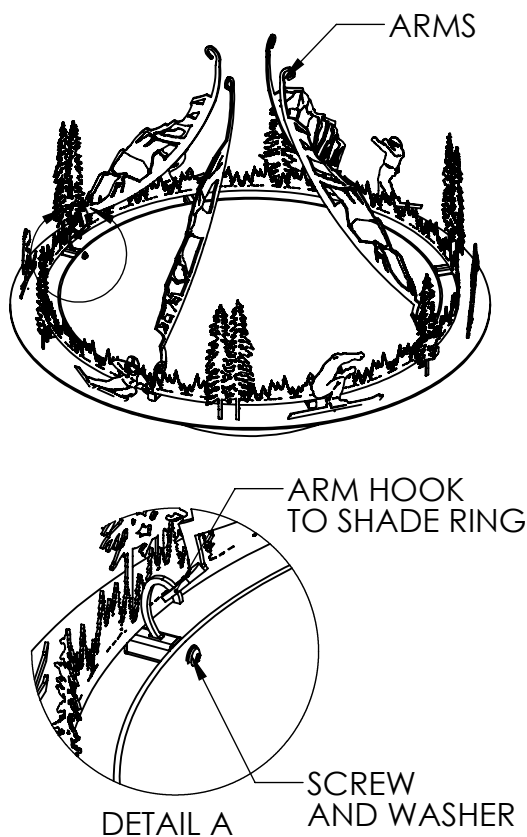

*DIMENSIONS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION
© MEYDA TIFFANY INC © DESIGN COPYRIGHT, MEYDA TIFFANY, INC. ALL RIGHTS RESERVED, NO UNAUTHORIZED DUPLICATION

*TRANSPARENT FINISHES WILL VARY DEPENDING ON THE MATERIAL TO WHICH IT IS APPLIED AND THE FABRICATION TECHNIQUE.





ID# 1-0059125129-2(70722)	W/O# 1515439	BULB# 4	DATE:4/28/2025
CUST. DESIGN#	QTY: 1	TYPE: E26 A19	DRAWN BY:IF1071
FIXTURE TYPE:INVERTED PENDANT	WATTS:60	VOLTAGE:120	SCALE: 1:4
LENS COLOR:113666 SAHARA TAUPE IDALIGHT(FROSTED OUT)	TOTAL AMPS:2	APPROVAL:	
METAL FINISH:3ANCOP ANTIQUE COPPER (106387) (TRANSPARENT)	LOCATION: DAMP	EST. WEIGHT:24.59 LBS	
MATERIAL:STEEL/ ACRYLIC	NOTES:	SHEET: 2 OF 3	



CUSTOMER PROPOSAL / CUT SHEET
"A Commitment to Excellence in Lighting and Service"
CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009
MONDAY - FRIDAY 9:00a.m - 5:00p.m ET
visit us on the web at www.meyda.com

REVISION:

OVERALL

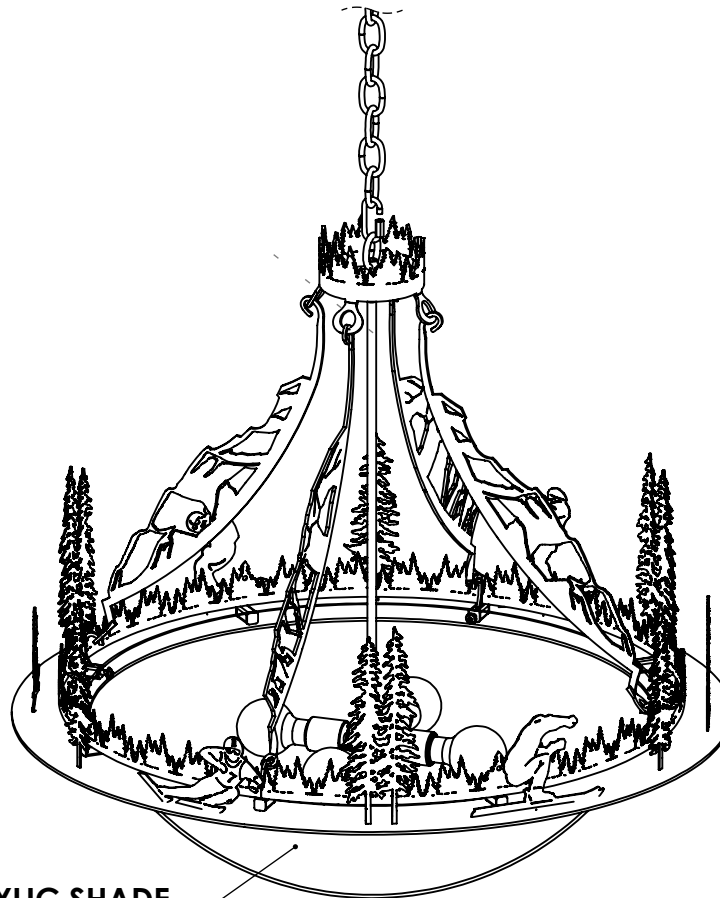

5. ACRYLIC SHADE



*DIMENSIONS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION
© MEYDA TIFFANY INC © DESIGN COPYRIGHT, MEYDA TIFFANY, INC. ALL RIGHTS RESERVED, NO UNAUTHORIZED DUPLICATION



*TRANSPARENT FINISHES WILL VARY DEPENDING ON THE MATERIAL TO WHICH IT IS APPLIED AND THE FABRICATION TECHNIQUE.

ID# 1-0059125129-2(70722)	W/O# 1515439	BULB# 4	DATE:4/28/2025
CUST. DESIGN#	QTY: 1	TYPE: E26 A19	(BULBS NOT INCLUDED) DRAWN BY:IF1071
FIXTURE TYPE:INVERTED PENDANT	WATTS:60	VOLTAGE:120	SCALE: 1:8
LENS COLOR:113666 SAHARA TAUPE IDALIGHT(FROSTED OUT)	TOTAL AMPS:2	APPROVAL:	
METAL FINISH:3ANCOP ANTIQUE COPPER (106387) (TRANSPARENT)	LOCATION: DAMP	EST. WEIGHT:24.59 LBS	
MATERIAL:STEEL/ ACRYLIC	NOTES:	SHEET: 3 OF 3	