

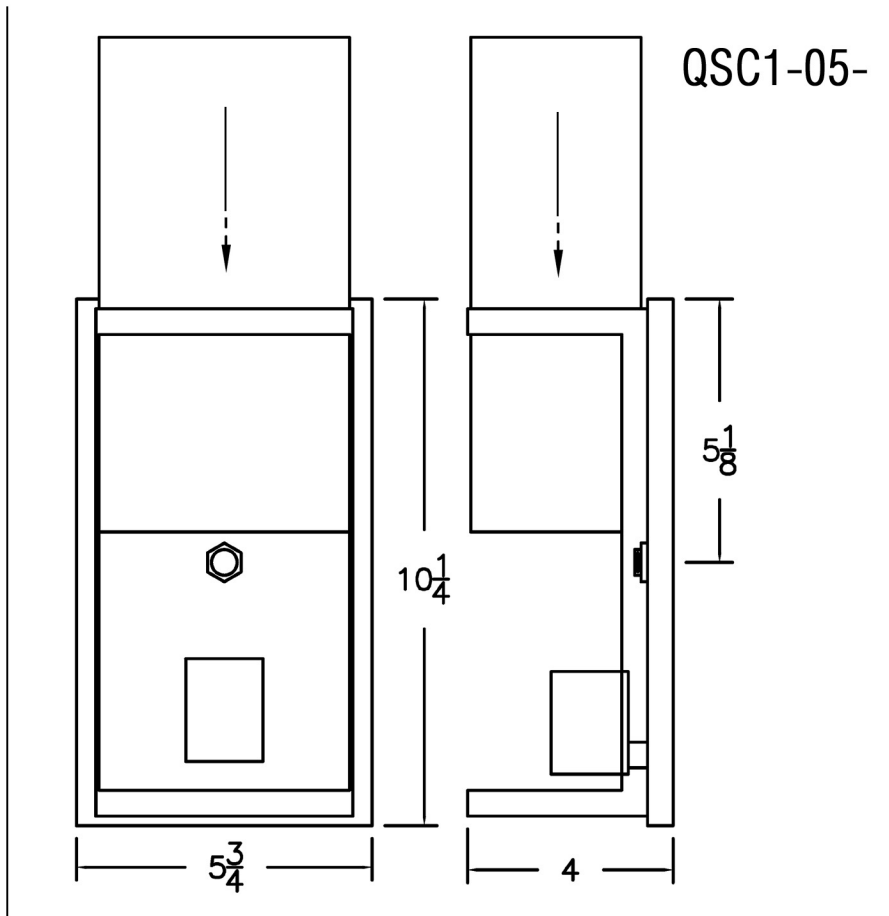


# ASSEMBLY INSTRUCTIONS FOR (QSC1-05-)

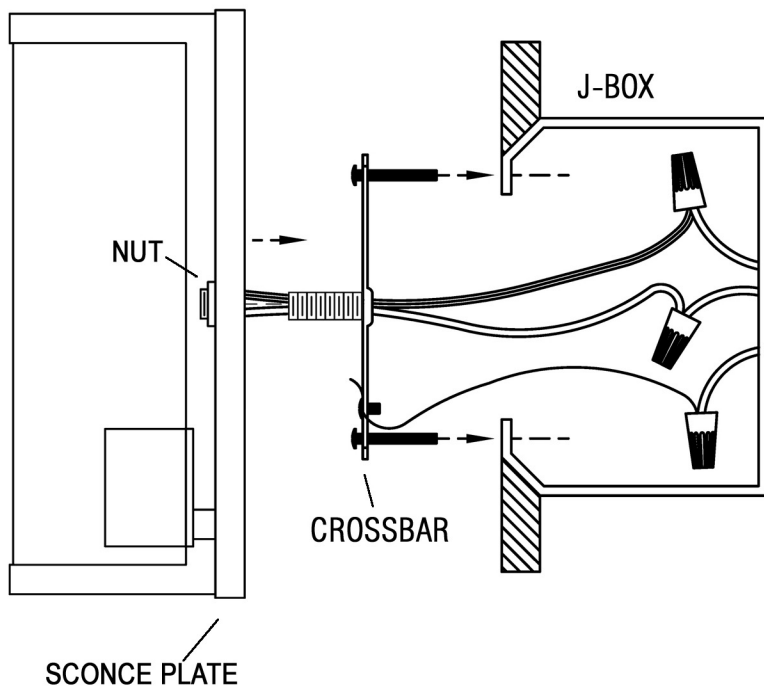

SLIDE GLASS SHADE  
FROM TOP OF FIXTURE  
INTO FRAME

THE LIP AT THE BOTTOM  
OF SHADE WILL HOLD  
GLASS IN PLACE



## IMPORTANT

TURN OFF THE POWER AT THE  
MAIN FUSE OR CIRCUIT BREAKER  
BOX BEFORE  
STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL  
PARTS BEFORE ASSEMBLY. BULBS ARE  
NOT INCLUDED

1. Remove crossbar from scone plate. (save hex nut).
2. Attach crossbar to J-BOX using screws provided.
3. Wire scone to J-BOX per local electrical code. Do not run wire through nipple/center of crossbar!
4. Slide scone plate over nipple attached to crossbar and secure against wall using hex nut that had been removed in step 1.
5. Turn power on to J-Box



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)