


ASSEMBLY INSTRUCTIONS FOR # 74045

Fig.1

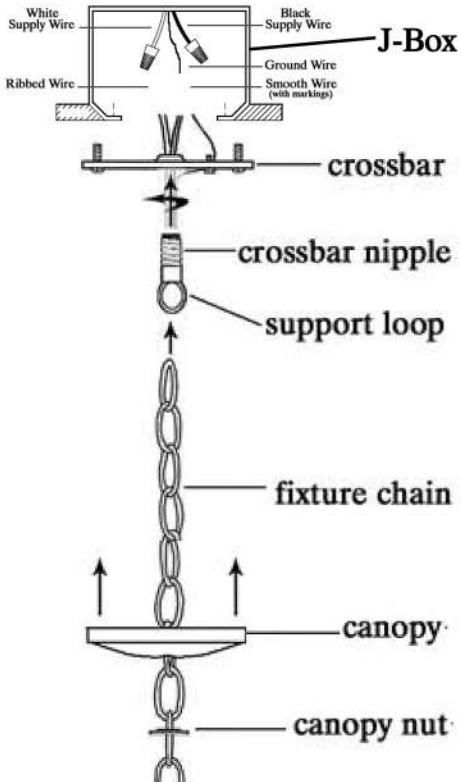

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

Steps 1-7 see Fig.1

1. Attach crossbar nipple with support loop to crossbar.
2. Attach crossbar to j box.
3. Attach fixture chain to hub loop. (Fig.2)
4. Place canopy nut then canopy on to fixture chain as shown.
5. Attach fixture chain to support loop.
6. Wire as per local electrical code.
7. Slide canopy up to ceiling, screw canopy nut onto crossbar nipple and tighten to canopy.
8. Place shades: take your socket ring off socket. Take cork ring off socket (may not be included, not all fixtures need it). Slide shade up socket and secure in place with the cork ring then socket ring.
9. Bulb your fixture, power on, enjoy your new fixture!
10. Have a Meyda Fine Day!



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com