
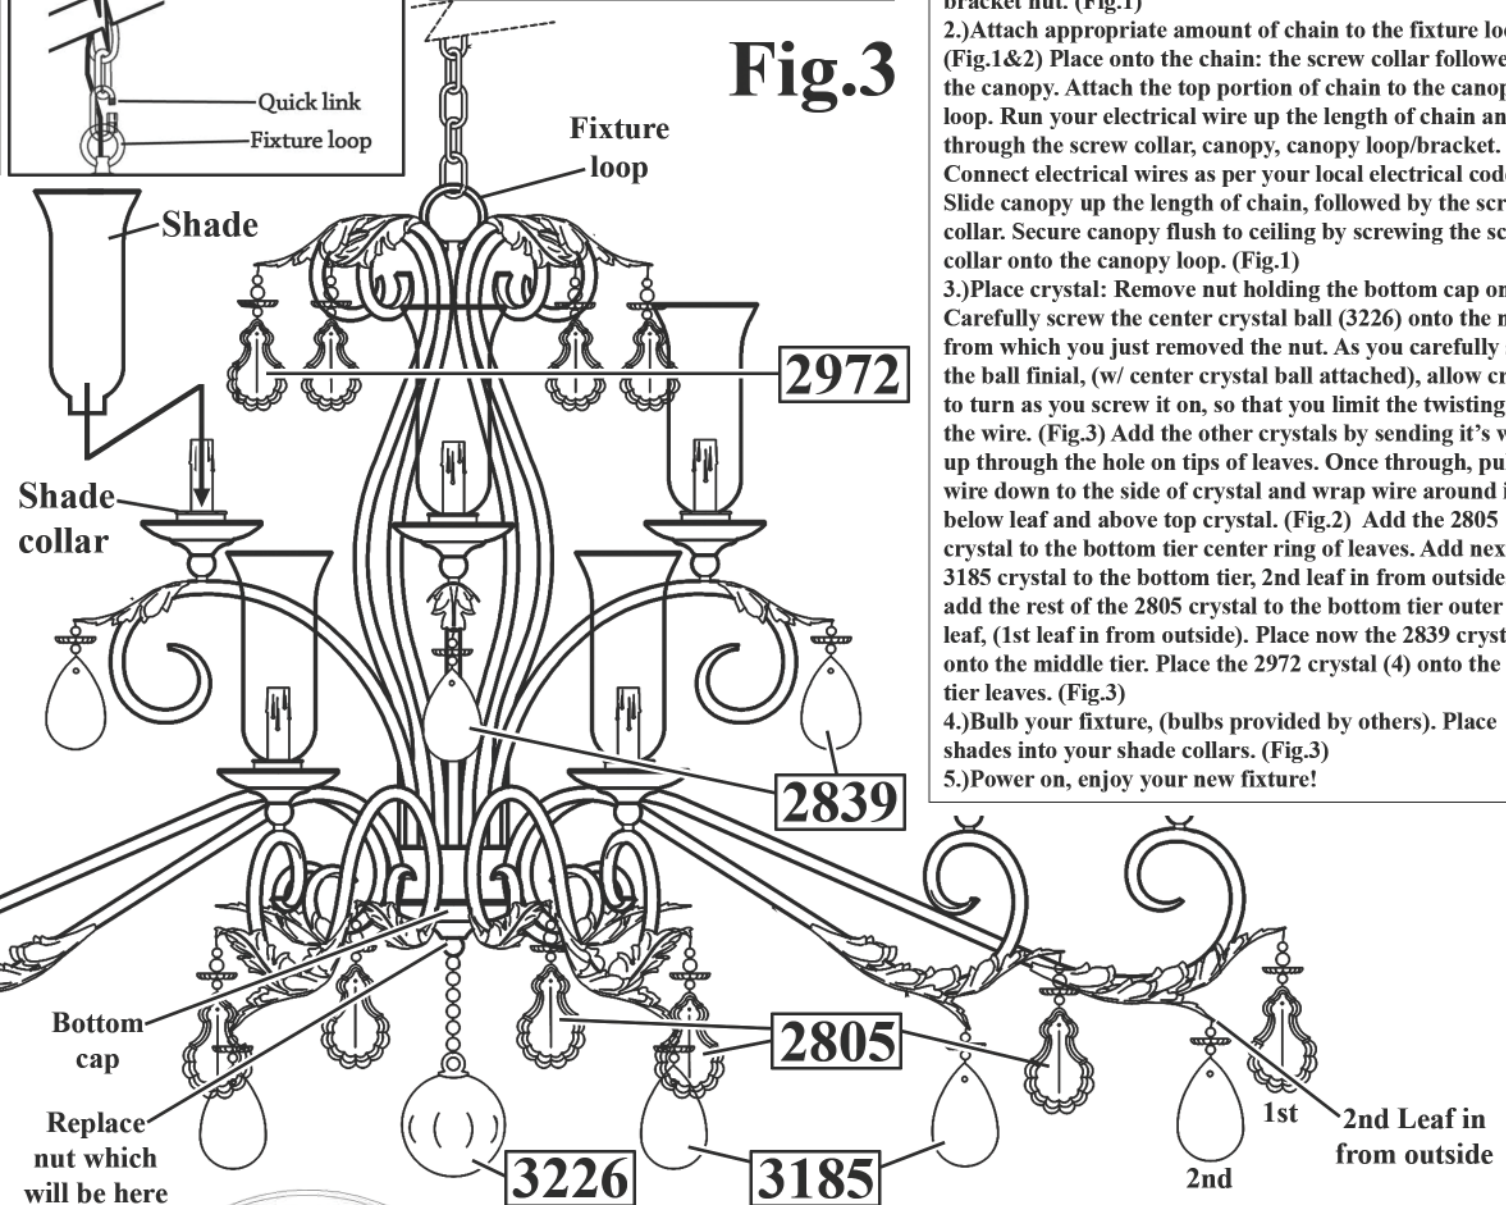
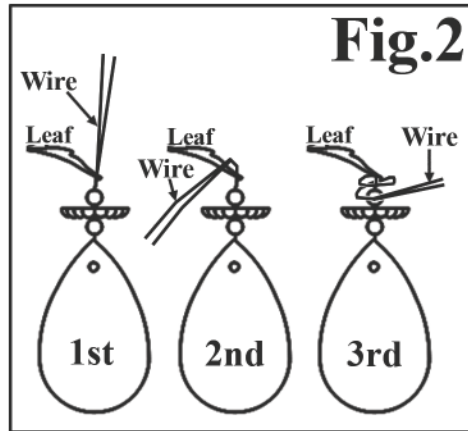


ASSEMBLY INSTRUCTIONS FOR # 183446

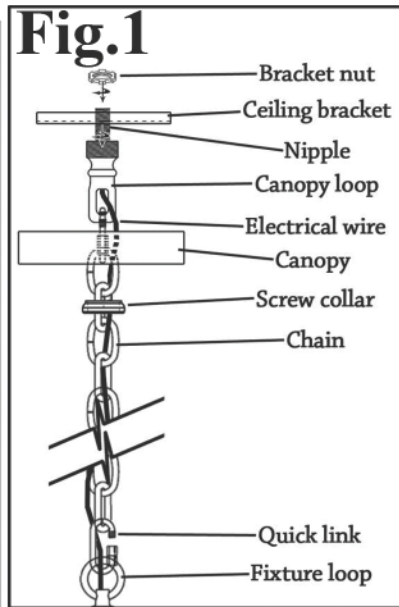

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR
CIRCUIT BREAKER BOX BEFORE STARTING
INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL
PARTS BEFORE ASSEMBLY. BULBS ARE NOT
INCLUDED

- 1.) Attach ceiling bracket to ceiling. Bracket should be assembled with a canopy loop screwed onto a nipple which is run through the bracket and secured on top of bracket with a bracket nut. (Fig.1)
- 2.) Attach appropriate amount of chain to the fixture loop. (Fig.1&2) Place onto the chain: the screw collar followed by the canopy. Attach the top portion of chain to the canopy loop. Run your electrical wire up the length of chain and through the screw collar, canopy, canopy loop/bracket. Connect electrical wires as per your local electrical code. Slide canopy up the length of chain, followed by the screw collar. Secure canopy flush to ceiling by screwing the screw collar onto the canopy loop. (Fig.1)
- 3.) Place crystal: Remove nut holding the bottom cap on. Carefully screw the center crystal ball (3226) onto the nipple from which you just removed the nut. As you carefully screw the ball finial, (w/ center crystal ball attached), allow crystal to turn as you screw it on, so that you limit the twisting of the wire. (Fig.3) Add the other crystals by sending it's wire up through the hole on tips of leaves. Once through, pull wire down to the side of crystal and wrap wire around itself below leaf and above top crystal. (Fig.2) Add the 2805 crystal to the bottom tier center ring of leaves. Add next the 3185 crystal to the bottom tier, 2nd leaf in from outside. Next add the rest of the 2805 crystal to the bottom tier outer most leaf, (1st leaf in from outside). Place now the 2839 crystal (4) onto the middle tier. Place the 2972 crystal (4) onto the top tier leaves. (Fig.3)
- 4.) Bulb your fixture, (bulbs provided by others). Place shades into your shade collars. (Fig.3)
- 5.) Power on, enjoy your new fixture!



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com