


ASSEMBLY INSTRUCTIONS FOR #61982-1(134750)

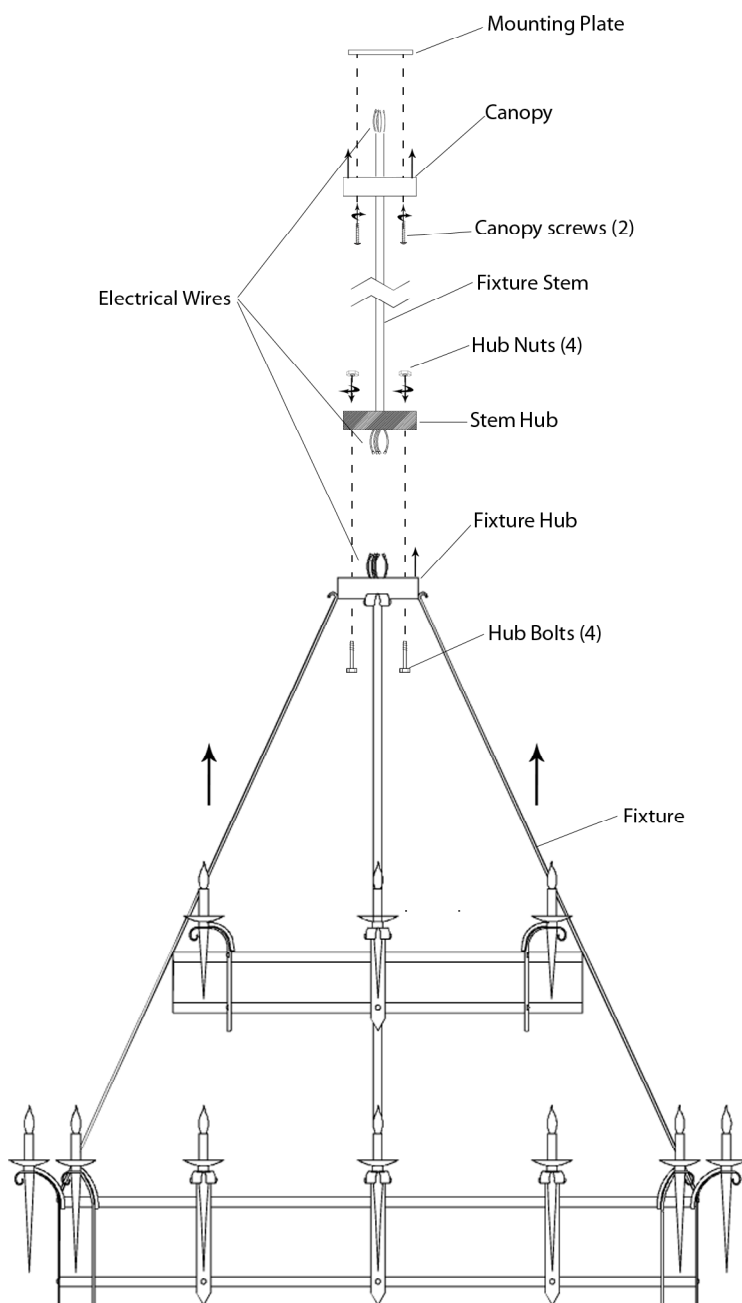

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

Note: All the electrical wires are labelled (A1, A2, A3, etc.) Be certain to connect each wire to its respective counter part.

- 1.) Remove canopy screws from mounting plate and slide canopy down fixture stem.
- 2.) Attach mounting plate to a secure location using customer supplied screws.
- 3.) Wire the electrical wires from top of fixture stem to power supply as per local electrical code.
- 4.) Slide canopy back up fixture stem and attach to mounting plate using canopy screws.
- 5.) Raise up fixture to stem hub and attach electrical wires from bottom of stem hub to fixture hub.
- 6.) Attach fixture hub to stem hub and secure with hub bolts/nuts provided.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com