
## ASSEMBLY INSTRUCTIONS FOR #144980

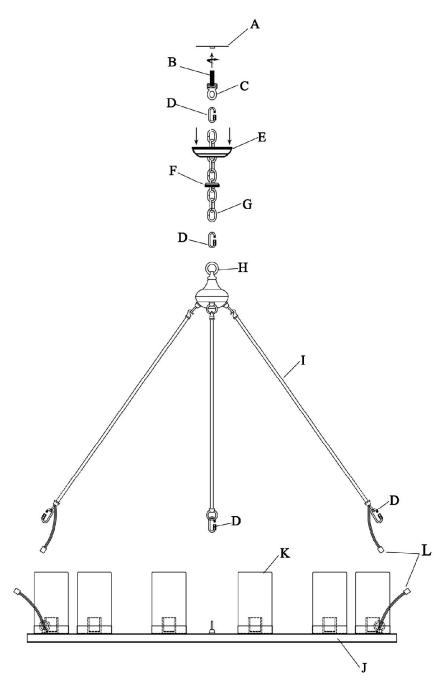

#### **IMPORTANT**

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) Attach cross bar nipple (B) with support loop (C) attached, to cross bar (A)
- 2.) Mount cross bar (A) to a secure location using customer provided screws.
- 3.) Attach fixture chain (G) to hub loop (H) using quick link (D).
- 4.) Place canopy nut (F) then canopy (E) onto fixture chain (G).
- 5.) Thread electrical wires from hub loop (H) up fixture chain (G), through canopy nut (F) and canopy (E).
- 6.) Wire as per local electrical codes.
- 7.) Slide canopy (E) up to ceiling and tighten canopy nut (F) to support loop (C).
- 8.) Attach fixture arms (I) to hub, raise up fixture frame (J) and secure with quick links (D).
- 9.) Connect electrical plugs (L) from fixture arm (I) to electrical plugs on fixture frame (J). 10.) Install light bulbs.
- 11.) Attach acrylic cylinders (K).



"A Commitment to Excellence in Lighting and Service"

# How to Care for your Meyda Lighting

- \* Before cleaning any lamp shade or fixture, disconnect the power source (unplug from outlets)
- \* To clean Meyda products made of opaque stained glass, art glass or jadestone, as well as most metal lamp bases and fixture frames, apply a lemon oil based furniture polish to a soft cloth, and wipe gently.
- \* To clean shades made of mica or fabric, wipe gently with a soft, dry cloth or feather duster.
- \* To clean Meyda products made of beveled or transparent glass, apply a household glass cleaner to a soft cloth and wipe gently.
- \* To clean Meyda products made of acrylic, apply warm soapy water with a soft cloth that has been wrung out well.

#110579



# Limited Lifetime Warranty Meyda Tiffany Inc.

Item# 144980

Meyda Tiffany warrants your product to be free from defects in materials and workmanship for life. If you discover a defect in our product, we will repair at our option using new components, or if repair is not possible, replace the fixture.

### Exclusions

This warranty covers defects in manufacturing while using the product as recommended by the manufacturer. The warranty does not cover loss or theft, nor does coverage extend to damage caused by misuse, abuse, unauthorized modification, improper storage conditions, lightning or natural disaster. The warranty does not cover parts that are subject to normal wear and tear replacement requirements such as sockets.