

# INSTALLATION INSTRUCTIONS

FOR ITEM 151830

**Meyda**  
CUSTOM LIGHTING

**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

**Caution:** Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.


## Fixture Components

1. CROSSBAR W/ 10-24 SCREWS
2. BACKPLATE
3. FRAME


**Caution:**

***Be sure power is off at the main breaker box prior to installation.  
Read all instructions in their entirety before beginning installation.***

1. Carefully unpack all components and make certain that everything is on hand.
2. Unscrew the 10-24 Phillips Head Screws on the side of the Backplate to release the Crossbar.
3. Using Customer Supplied Hardware, affix the Crossbar directly to the J-Box ensuring the connection is suitable for a minimum of 10 Lbs and that electrical supply wires remain accessible.
4. Following all local codes and procedures make electrical wires connections from supply wires to fixture lead wires.
5. Connect the Backplate to the Crossbar with the 10-24 Phillips Head Screws from before.
6. Install 2x 40W E26 T10 Bulbs (not included) into Socket.
7. Power on and ENJOY!!!

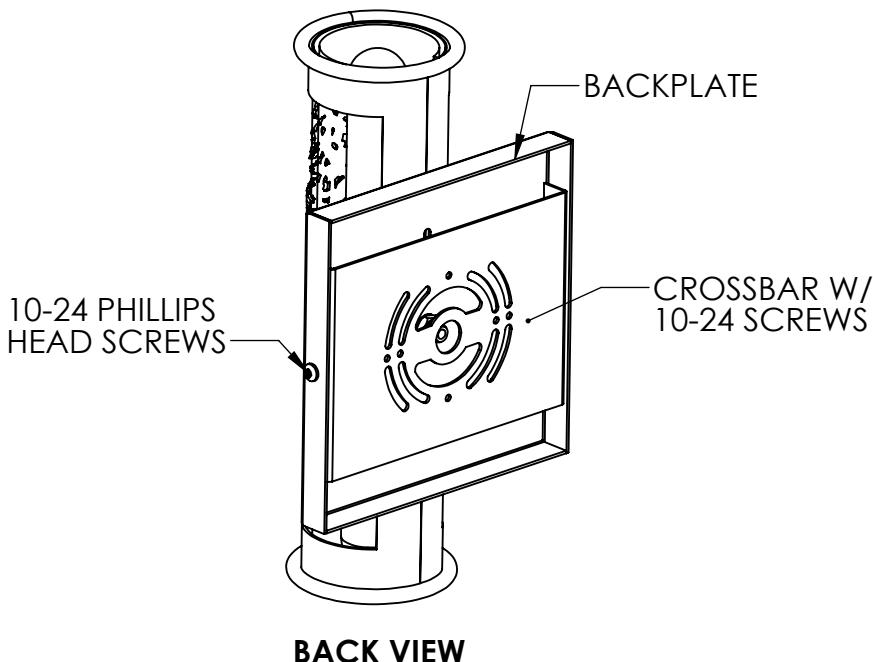

**BACK VIEW**

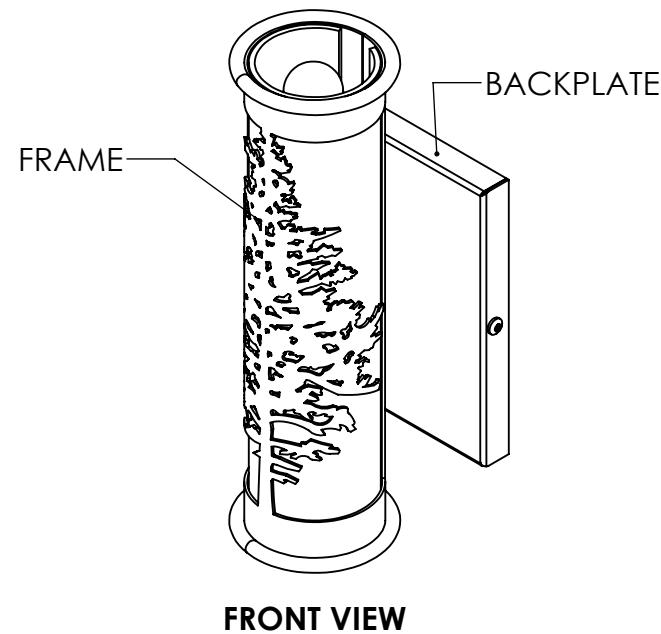

**FRONT VIEW**