




## ASSEMBLY INSTRUCTIONS FOR # 161728

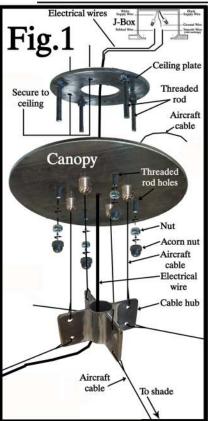









## **IMPORTANT**

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.)Secure canopy plate to ceiling.
- 2.) Assemble hardware: Attach your cables to your hub. (Fig.2) The cables that are already attached to the hub are for your shade. Run your cables up through your canopy, (Fig.1) once through; slide the locking collar onto the cable (inside canopy) follow that with your U-bolt. Determine desired length and tighten set screw and then U-bolt. (Fig.3) You will take all four cables and make them into a loop, secure loop with U-bolt. This loop will act as your safety cable (Fig.4), attach to a secure location in ceiling.
- 3.) Attach downward cables to shade: Bring shade to your cables, run each cable through its appropriate cable grip. Unscrew the grip nut just a little, enough to pull back on it. This will allow cable to pass freely, let grip nut go and it will grip cable. Once you are satisfied with cable length screw grip nut back down towards cable grip & shade. (Fig. 5) 4.) Run your electrical wire up the cables,
- 4.) Run your electrical wire up the cables, through the hub center, and through center of canopy. Attach all electrical wires as per local codes. (Fig. 1)
- 5.) Slide canopy up onto the four bolts that point down from ceiling plate. Secure flush to ceiling with the nuts & acorn nuts provided. (Fig. 1)
- 6.) Bulb your fixture, power on, enjoy!
- 7.) Have a Meyda Fine Day!



2ND AVE."

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-843-1602 MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET visit us on the web at www.2ndave.com