


ASSEMBLY INSTRUCTIONS FOR # 164010

FIG.1

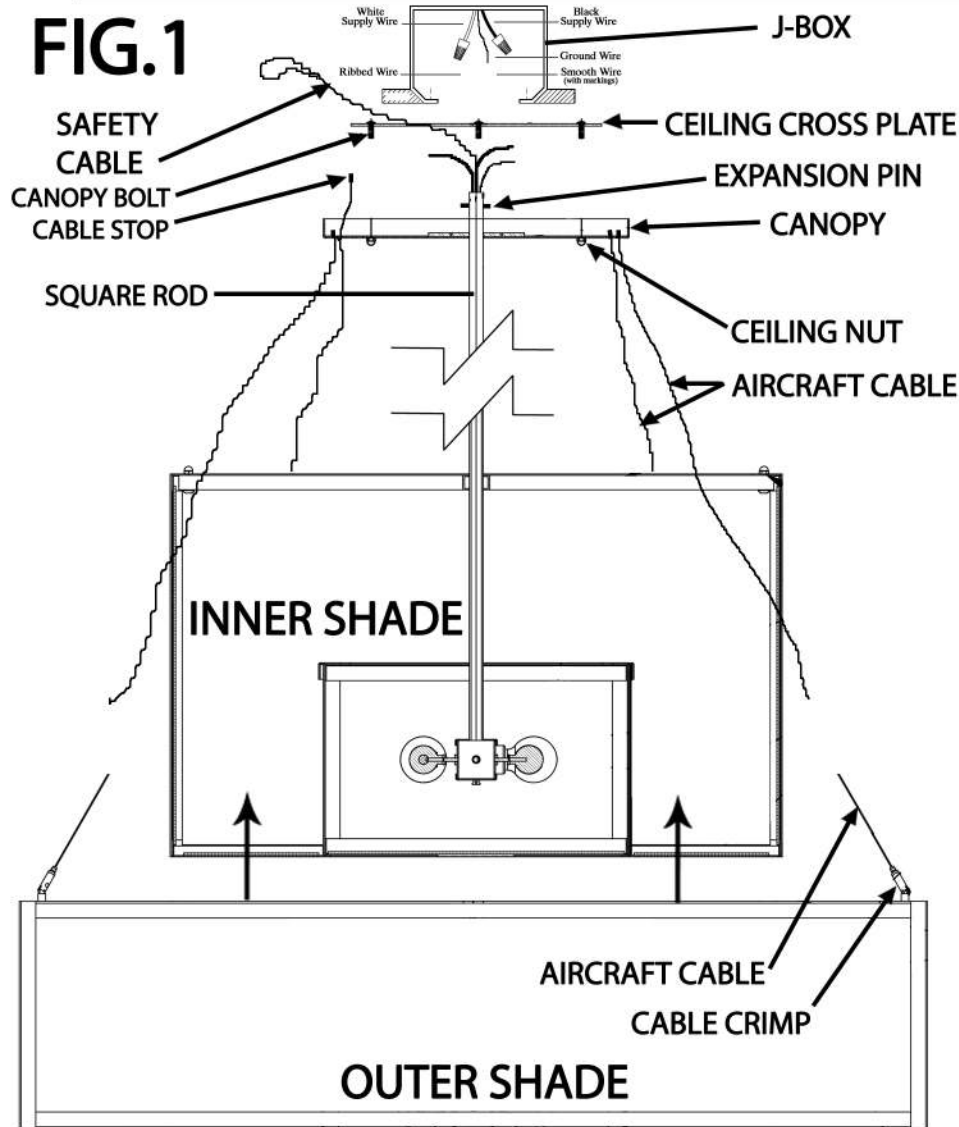

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) First bolt your ceiling cross plate to your ceiling. Be sure to accommodate for 90lbs.
- 2.) Place your canopy onto square rod followed by rotating pivot disk. (FIG.1&2) Then insert expansion pin into holes at the top of your square rod. (FIG.3)
- 3.) Next take your aircraft cables (4) and run them through each of the four corners of the canopy, (you will see a small hole in each corner). The stop affixed to each cable should end up inside the canopy with the cable hanging down towards the fixture. (FIG.1)
- 4.) Bring your fixture to the ceiling, attach safety cable to a secure location inside your ceiling. Attach all electrical wires as per local codes. (FIG.1)
- 5.) Slide canopy with rotating disk up to the expansion pin making sure it fits snug into the rotating disk's groove. (FIG.2)
- 6.) Slide canopy onto the four bolts pointing down out of the ceiling cross. Secure canopy with four canopy nuts provided. (FIG.1)
- 7.) Lift larger shade to inner shade & aircraft cables, (FIG.1) take your aircraft cables and run them through the cable crimp. Loosen the crimp nut and press down, this will allow the cable to pass through. Let up on the nut and it will grab cable. When you have it adjusted where you want it, screw the nut back down. You may cut excess cable at this time but be sure first it is where you want it. (FIG.4)
- 8.) Power on, enjoy your new fixture.

FIG.2


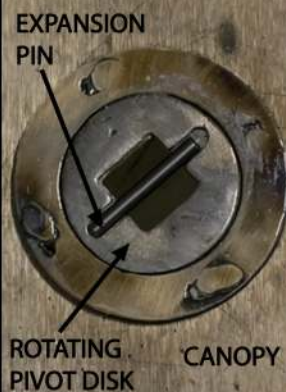


FIG.3



FIG.4

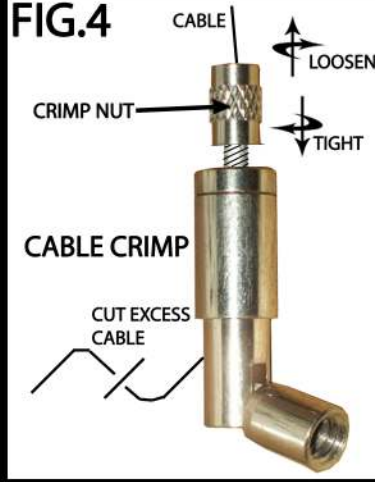

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com