
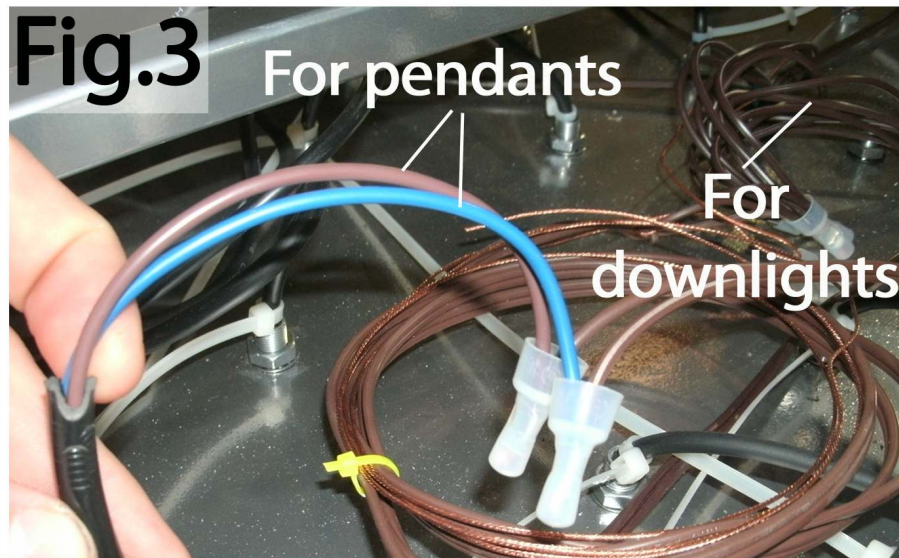
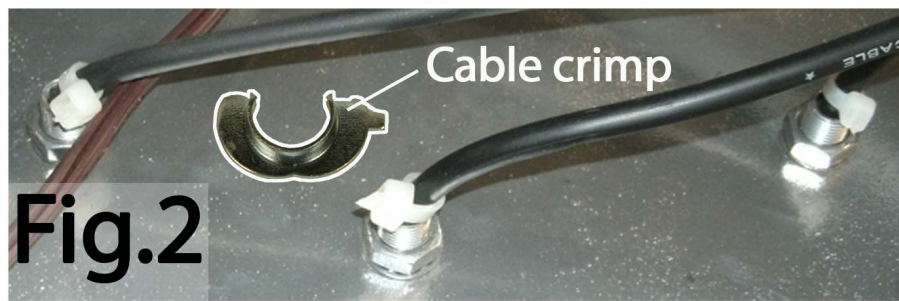


**THIS FIXTURE WEIGHS OVER 50 LBS.**

0700 12/10/15

NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

## ASSEMBLY INSTRUCTIONS FOR #170905

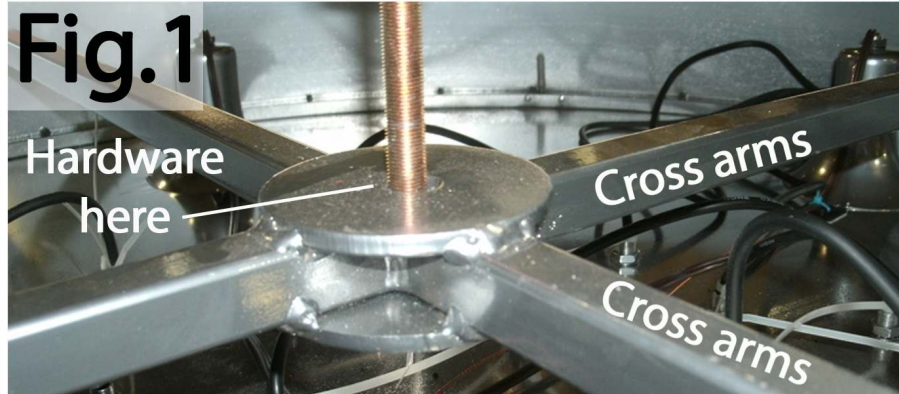


### IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Assemble fixture first.(Fig.1)
- 2.) Adjust the height of your pendants by slipping the cable up or down through the canopy. The zip ties are intended to be temporary only. Once you are satisfied with the height, use the metal grip clamps provided. Clamp them onto the cable enough to grip without slipping. Do not over tighten.(Fig.2)
- 3.) Your brown & blue wire is for the pendants, your brown wires are for the downlights. (Fig.3)
- 4.) Bring fixture to power source, and connect all electrical wires as per your local codes. Connect your hardware to the cross arms inside canopy.(Fig.1)
- 5.) Attach your pendants to your hanging cables.(Fig.4)
- 6.) Bulb your downlights (bulbs provided by others), power on, enjoy your new fixture!

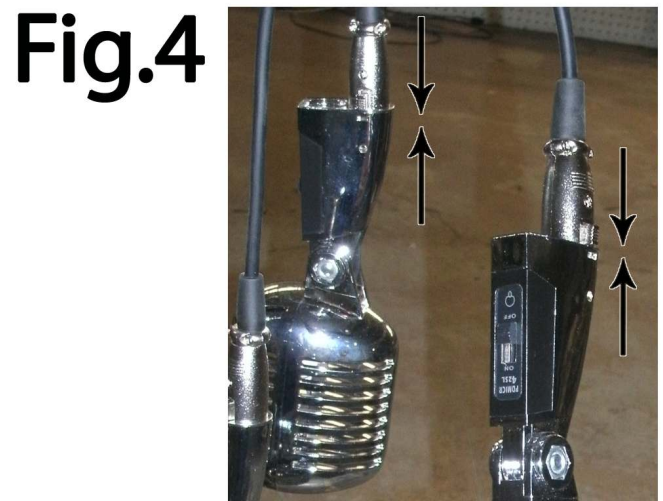

*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at [www.meyda.com](http://www.meyda.com)