
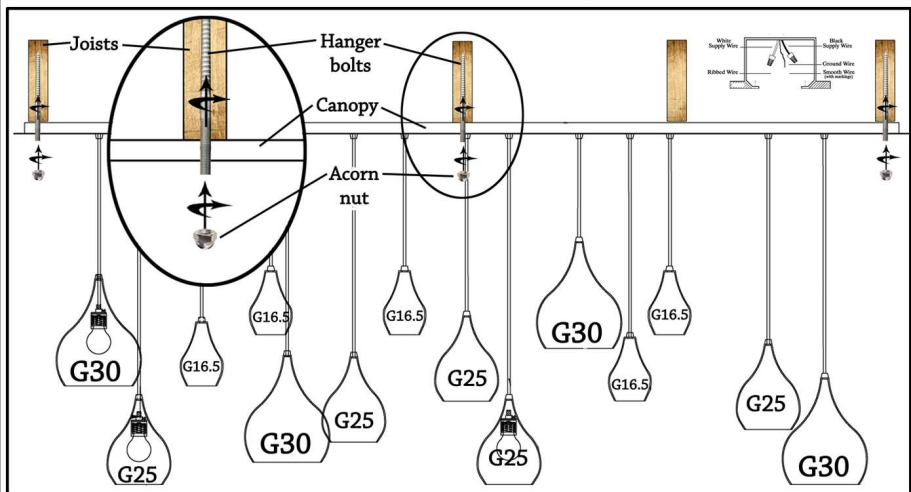


THIS FIXTURE WEIGHS OVER 50 LBS.

0700 03/9/16

NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

ASSEMBLY INSTRUCTIONS FOR #177046

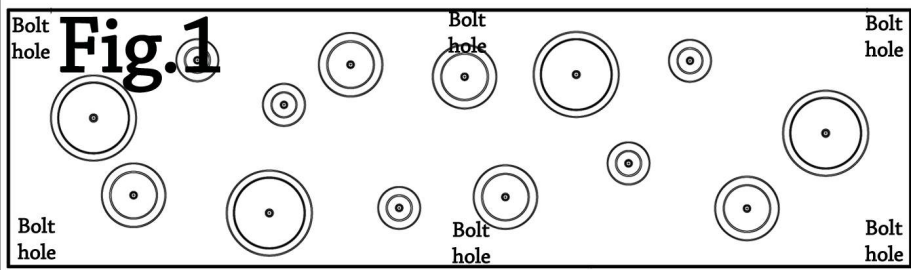




IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

!MULTIPLE PERSON JOB!

- 1.) Drive your hanger bolts into your joists (six), to match the six holes in canopy. (Fig.1)
- 2.) Run your electrical cords through the canopy, (Fig.2) when you are sure you have the height desired, squeeze your cord clamps onto cord. Squeeze till snug, but do not over tighten. You may first tie a temporary knot to observe & adjust heights. (Fig.3)
- 3.) Bring canopy/fixture to ceiling, connect all electrical wires as per your local codes.
- 4.) Slide canopy up onto the hanger bolts, onto the six holes in canopy. Secure fixture flush to ceiling by screwing acorn nuts onto hanger bolts. (Fig.1)
- 5.) Bulb your fixture, (bulbs not included). See Fig.1 for suggested bulbs. Power on, enjoy your new fixture!

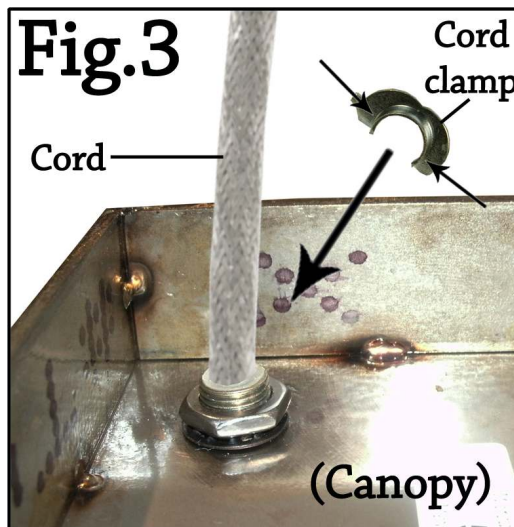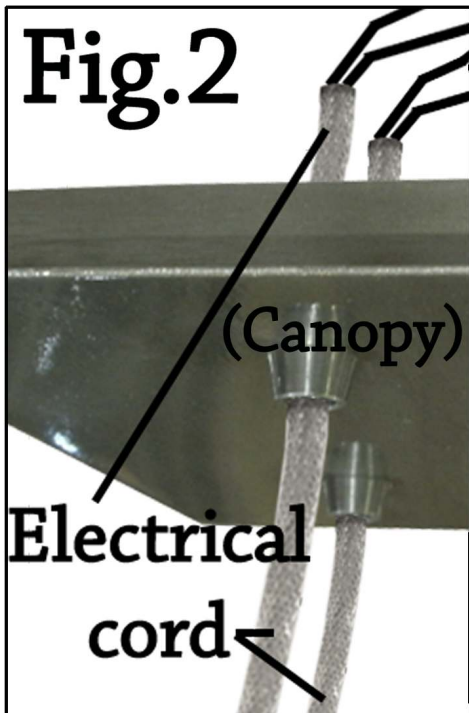

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com