
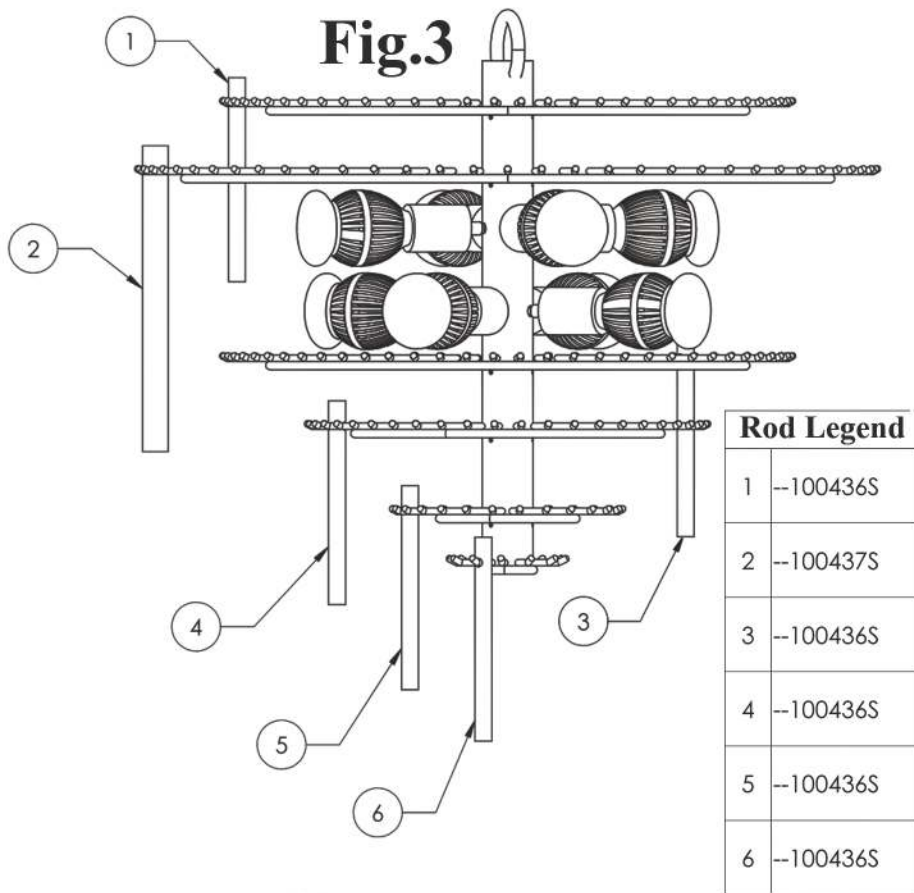
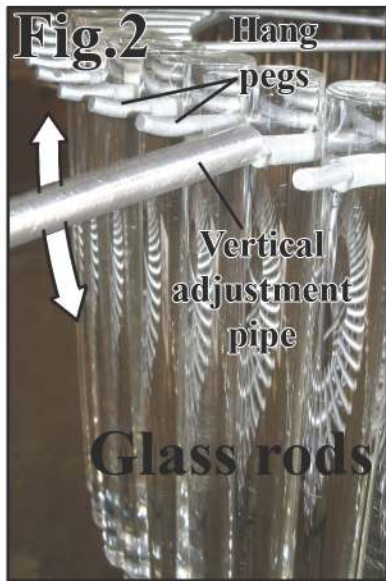


**THIS FIXTURE WEIGHS OVER 65 LBS.**

0700 12/06/16

**NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.**

# ASSEMBLY INSTRUCTIONS FOR #178219

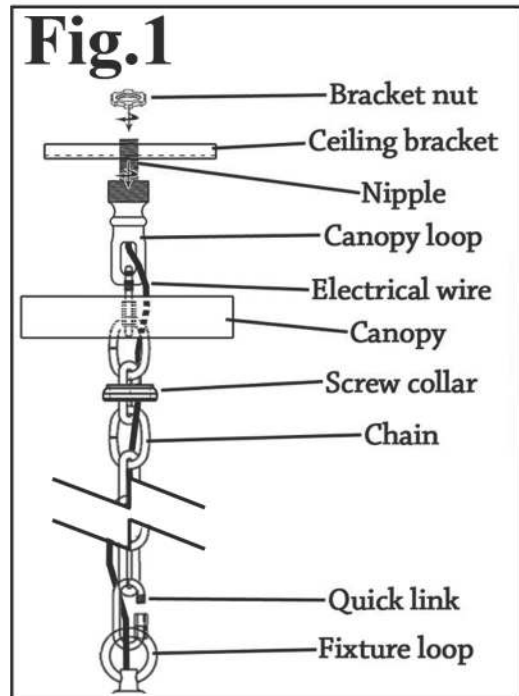

## IMPORTANT

**TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION**

**CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED**

- 1.) Attach the desired amount of chain to your fixture's loop, using quick link provided. Place onto the chain the screw collar and canopy, (in that order). Attach the other end of chain to your canopy loop using quick link provided. Screw into the canopy loop the nipple, ceiling bracket, and last the bracket nut will secure them together. (Fig.1)
- 2.) Run your electrical wire up the length of chain and through the canopy loop. Attach ceiling bracket to ceiling. (Fig.1) Connect electrical wires as per your local electrical code.
- 3.) Slide canopy up the chain to ceiling followed by the screw collar. Secure canopy flush to ceiling by screwing the screw collar onto canopy loop. (Fig.1)
- 4.) Start placing glass rods: Use the rod legend to choose correct size rods for each peg tier. Start with #1 (top tier of hang pegs). After each tier completed, check to see that the rods hang straight. If not, see step 4. Continue on with #6, #5, #4, #3, and you may want to bulb your fixture at this time if not already. (bulbs provided by others). Finally place rods for tier #2. (Fig.3)
- 5.) Pegs were adjusted for best vertical hang before shipping. However, if needed, we have included a vertical adjustment pipe. Gently put the pipe onto the peg needing adjustment, and bend slightly up or down. Bending up will of course allow the bottom of rod to move out away from center of fixture. Bending down will do the opposite. Do not adjust if not needed. (Fig.2)
- 6.) Power on, enjoy your beautiful new fixture!



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at [www.meyda.com](http://www.meyda.com)