

**THIS FIXTURE WEIGHS OVER 140 LBS.**

0700 11/22/16

NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.



## ASSEMBLY INSTRUCTIONS FOR #179169

### IMPORTANT

**TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION**

**CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED**

- 1.) Bring canopy to ceiling, connect electrical wires as per your local electrical code. Attach your canopy to ceiling. There will be aircraft cables already attached to this canopy. Let them hang down. The cables will be labeled, so match up the corresponding cables with the correct cable grip.**
- 2.) Send cables through cable grip. Unscrew the grip nut a little, not all the way. Push grip nut down towards light ring. In this manner you will be able to push cable freely through. Let go of grip nut, and it will grip. Fine tune your adjustments, and when you are satisfied with the position, screw the grip nut back down. If you are absolutely sure that there will be no adjustments in the future, you may cut excess cable.**
- 3.) Power on, enjoy your new fixture!**

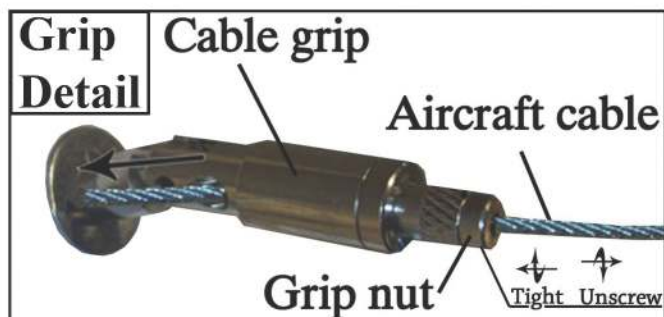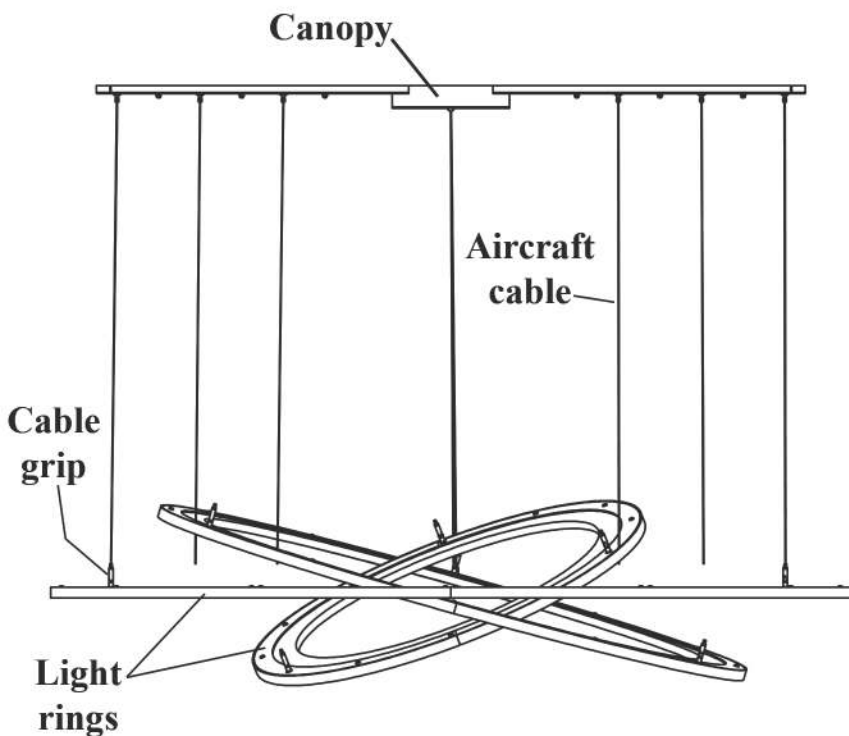

*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at [www.meyda.com](http://www.meyda.com)