


**THIS FIXTURE WEIGHS OVER 75 LBS.**


0700 11/09/16

**NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.**

## ASSEMBLY INSTRUCTIONS FOR # 182547

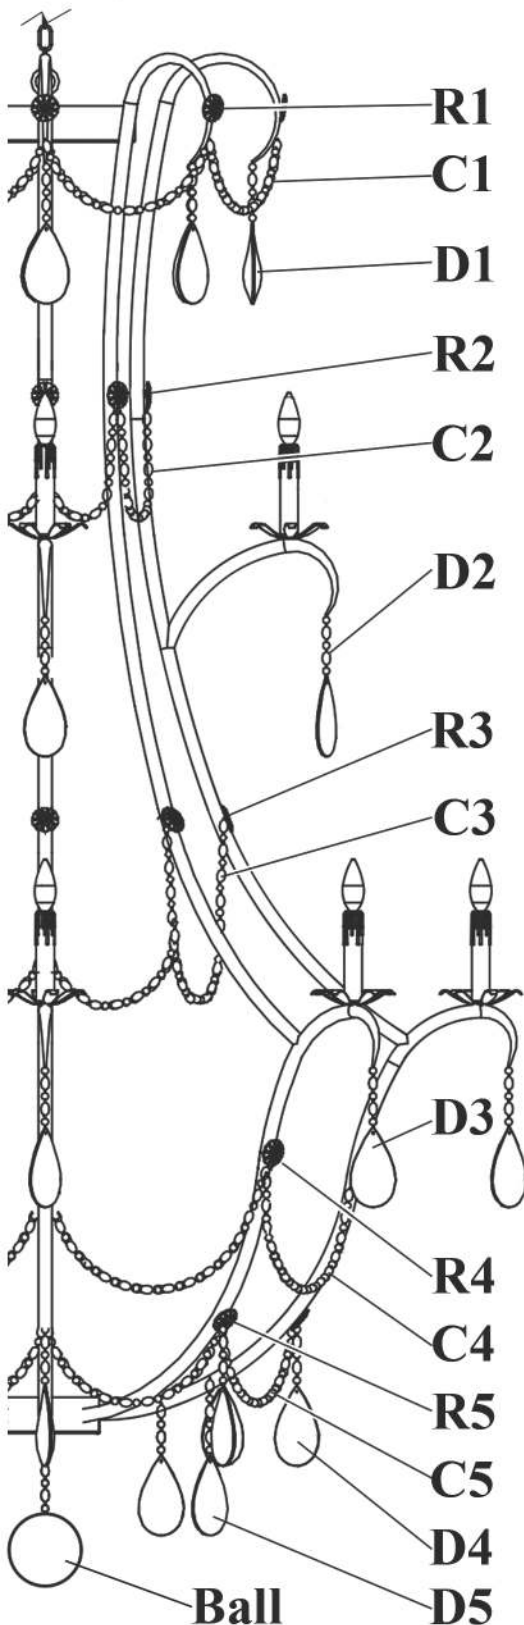

### Canopy Detail

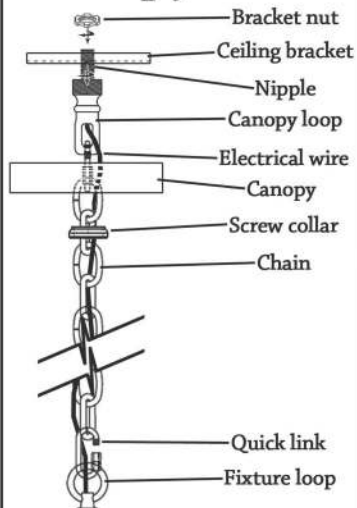

**R=Rosettes  
C=Chain  
D=Drop**

### Rosette Detail 1




### IMPORTANT

**TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION**

**CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED**

- 1.) Assemble your ceiling bracket: A nipple through the ceiling bracket, with a bracket nut screwed onto the top of the nipple, (above the bracket). The canopy loop will be screwed onto the nipple. Attach the ceiling bracket to the ceiling. (You may complete step 2 before or after bracket is attached to the ceiling.)
- 2.) Attach the appropriate amount of chain to the fixture loop, using a quick link provided. Place onto the chain the screw collar, and then the canopy. Attach the top of the chain to canopy loop.
- 3.) Run your electrical wires up the length of chain, and through the screw collar, canopy, and then canopy loop/-ceiling bracket. Connect electrical wires as per your local electrical code. Slide canopy up the chain followed by the screw collar. Screw the collar onto the canopy loop, thus making the canopy flush to ceiling.
- 4.) Attach crystal: Follow the diagram for crystal placement. Rosette 1 (R1) will be attached by itself, as well as Chain 1 (C1), & Drop crystal 1 (D1). When placing rosette, it will slide into nub, you will position it so that it faces out, & then you will wrap the wire around nub. (Rosette Detail 1) C1 & D1 will hook into nub or hole. R2, 3, & 4 will be attached with C2, 3, 4 as shown in the R. Detail 1. Note how the chain hooks wrap around nub, with rosette placed through nub in front of chain hooks. C5's will attach to a hook extension, which will be wrapped around nub, while R5 pierces the nub just like the others. D4 is also attached to the hook extension. (Rosette Detail 2) D5 is hooked on nub. The ball crystal is attached to a half-ball finial. Simply screw half-ball finial into the underside of fixture.
- 5.) Bulb your fixture, (bulbs provided by others). Power on, enjoy your new chandelier!

### Rosette Detail 2

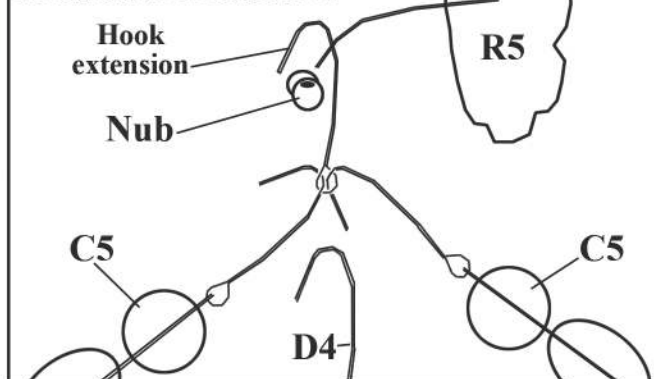

*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at [www.meyda.com](http://www.meyda.com)