

INSTALLATION INSTRUCTIONS

FOR ITEM 265951 (23" Wide Tall Pines Inverted Pendant)

Meyda
CUSTOM LIGHTING

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

FIXTURE COMPONENTS

1. CANOPY ASSEMBLY (CANOPY, CROSSBAR, CROSSBAR LOOP, COLLAR)
2. QUICK LINK (QTY.- 2)
3. CHAIN
4. HUB ASSEMBLY (HUB, PIPE, LIGHT CLUSTER)
5. SHADE


Caution:

Fixture is OVERWEIGHT and not suitable for installation with standard Junction Box.

Be sure power is off at the main breaker box prior to installation.

Read all instructions in their entirety before beginning installation.

1. Carefully unpack all components and make certain that everything is on hand.
2. Remove Collar Loop from Canopy Assembly to release Crossbar with Loop and Quick Link.
3. Affix Crossbar to Junction Box ensuring that connection is Suitable for 40 lbs. and that Electrical Supply Wires remain accessible.
4. Attach desired length of Chain to Quick Link on Hub Loop.
5. Weave Fixture Lead Wires Through every 3rd Link of Chain.
6. Hang Hub Assembly by attaching loose end of Chain to Quick Link on Crossbar Loop.
7. Feed Lead wires through Crossbar loop and, Following All Local Codes and Procedures, make Electrical Connections from Lead Wires to Supply Wires.
8. Slide Canopy up the Chain to ceiling and crew Collar onto Crossbar Loop until secure.
9. Install 4X 60W E26 A19 Bulbs (not included) into the sockets.
10. Hang shade to the Hooks using Chain attached to the Shade.
11. Power On and ENJOY!!!

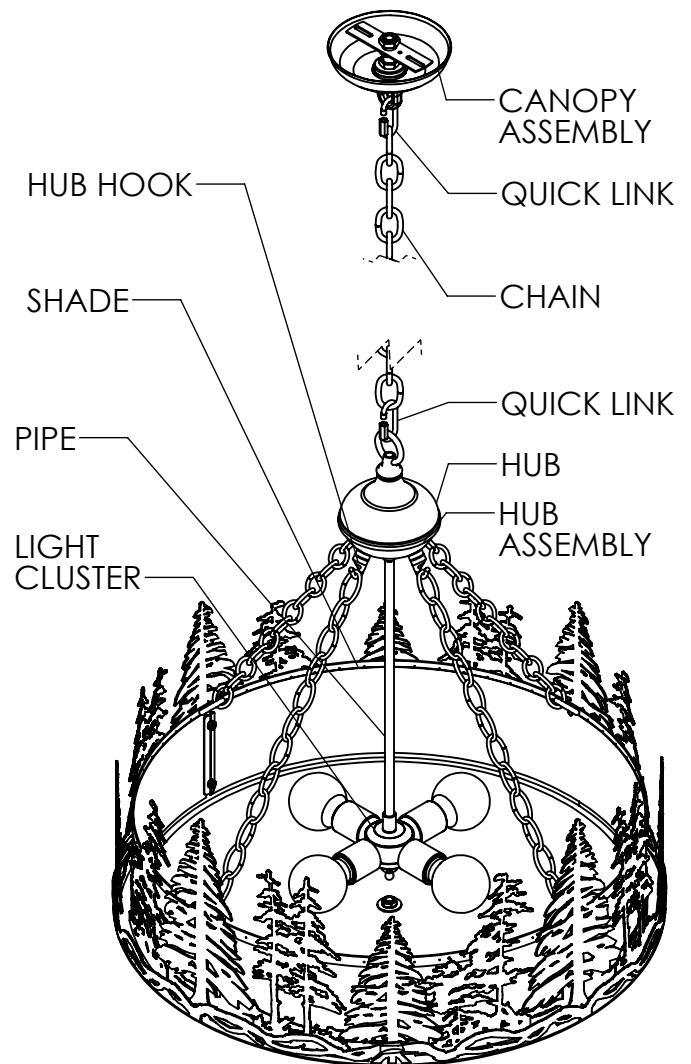

INSTALLATION INSTRUCTIONS


FOR ITEM (23" Wide Tall Pines Inverted Pendant)

Meyda
CUSTOM LIGHTING

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

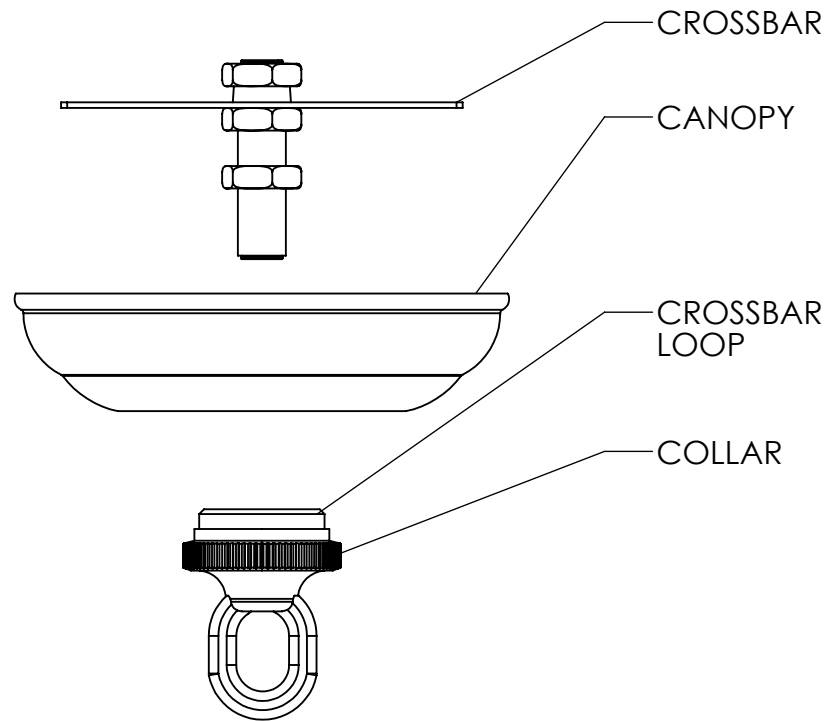

CANOPY ASSEMBLY