


ASSEMBLY INSTRUCTIONS FOR #115048, 112640, 112634

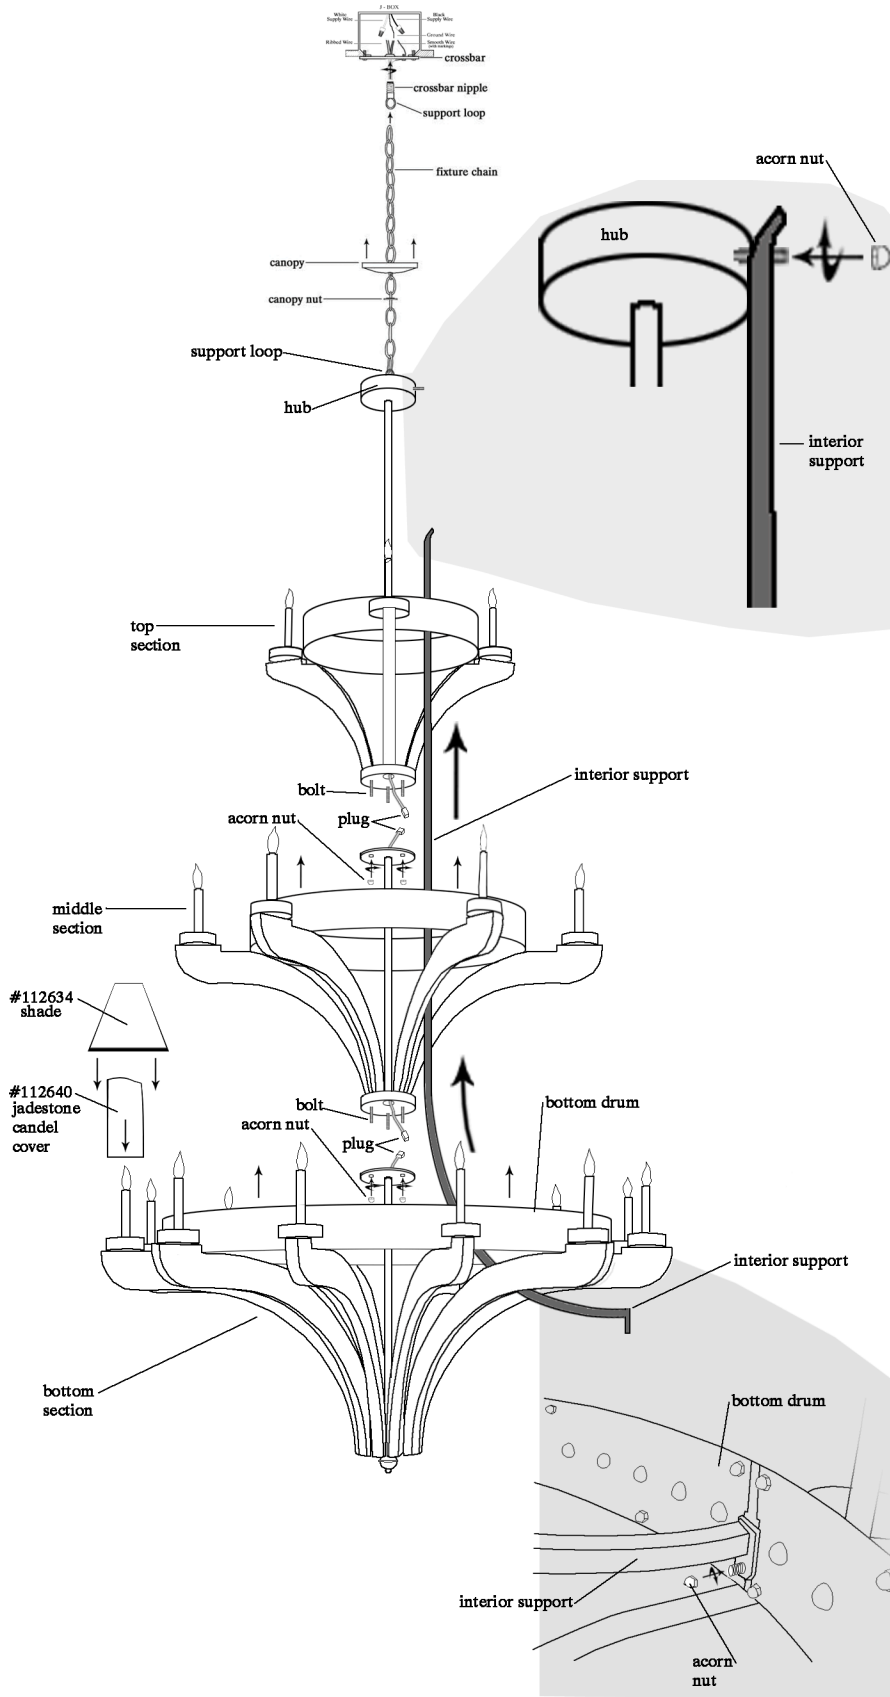

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

1. Attach crossbar with crossbar nipple and support loop to j-box.
2. Attach fixture chain to hub loop, place canopy nut than canopy onto fixture chain, attach fixture chain to support loop.
3. Wire as per local electrical code.
4. Plug center section into top section, place center section up and onto top section bolts, attach with acorn nuts.
5. Repeat step 4 for bottom section.
6. Place interior supports through fixture, attach top of interior support to hub and bottom of interior support to inside of bottom drum as shown.
7. Place light bulbs into sockets.
8. For item #112640, place jadestone candel covers onto fixture arms.
9. For item #112634, place shades onto light bulbs.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com