

# INSTALLATION INSTRUCTIONS

FOR ITEM 133374



**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

**Caution:** Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

## FIXTURE COMPONENTS

1. FIXTURE FRAME
2. CANOPY
3. IDALIGHT TUBES (QTY: 324)

### ***Caution:***

***Fixture is OVERWEIGHT and not suitable for installation with standard Junction Box.***

***Be sure power is off at the main breaker box prior to installation.***

***Read all instructions in their entirety before beginning installation.***

1. Carefully unpack all components and make certain that everything is on hand.
2. Unscrew acorn nuts and hex nuts from the canopy to release the mounting plate. Save these for later.
3. Using customer supplied hardware, affix the mounting plate directly to the ceiling ensuring the connection is suitable for 140 lbs. and that electrical supply wires remain accessible.
4. With at least three people lift the canopy and frame and reconnect to the mounting plate using the acorn nuts and hex nuts from before.
5. Level/adjust the height of the fixture by loosening the knurled barrel on the cable grippers.
6. Loosen the finial on the canopy to remove the wire access plate.
7. Following all local codes and procedures, make electrical wire connections from supply wires to fixture lead wires and re-connect the wire access plate with the finial from before.
8. Install 16x 60W E26 T10 (bulbs not included).
9. Slide idalight tubes into the fixture frame.
10. Power on and ENJOY!



# INSTALLATION INSTRUCTIONS

REVISION:


"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009


MONDAY - FRIDAY 9:00a.m - 5:00p.m ET

visit us on the web at [www.meyda.com](http://www.meyda.com)

## 1) FIXTURE FRAME

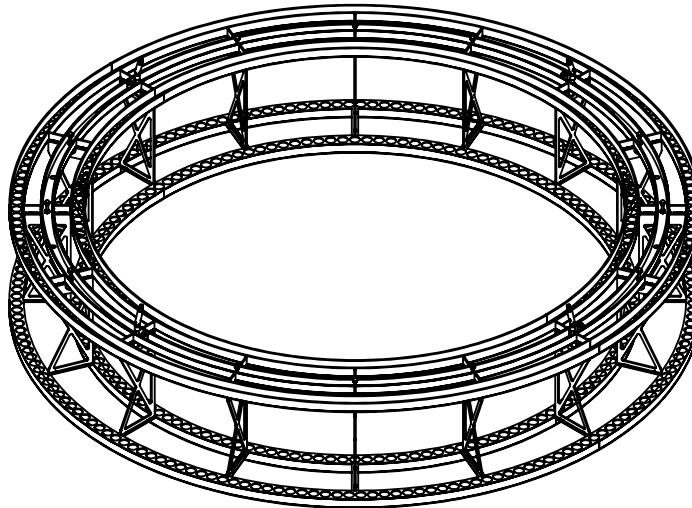

## 2) CANOPY

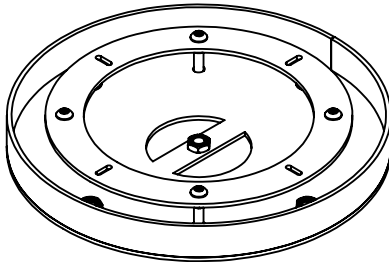

## 3) IDALIGHT CYLINDER (QTY: 324)



\*DIMENSIONS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION  
© MEYDA TIFFANY INC © DESIGN COPYRIGHT, MEYDA TIFFANY, INC. ALL RIGHTS RESERVED, NO UNAUTHORIZED DUPLICATION

\*TRANSPARENT FINISHES WILL VARY DEPENDING ON THE MATERIAL TO WHICH IT IS APPLIED AND THE FABRICATION TECHNIQUE.



ID# 48259-300(133374)	BULB# 16 (BULBS NOT INCLUDED)	DATE:11/10/2025
CUST. DESIGN#	TYPE: E26 T10	DRAWN BY:MZ 985
FIXTURE TYPE: PENDANT	WATTS:60	VOLTAGE:120
SCALE: 1:15	TOTAL AMPS:8	APPROVAL:
LENS COLOR:3/4"W X 1/16"THK ACRYLIC TUBE CLEAR (--4591)(NOT FROSTED)	LOCATION: DAMP	EST. WEIGHT:122.81
METAL FINISH:3NKL NICKEL (106411)	NOTES:	SHEET: 2 OF 2
MATERIAL:STEEL/ ACRYLIC		