

INSTALLATION INSTRUCTIONS

FOR ITEM 154147

Meyda
CUSTOM LIGHTING


CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

FIXTURE COMPONENTS

1. CANOPY
2. STEM
3. LAMPING CROSSBAR
4. FABRIC SHADE

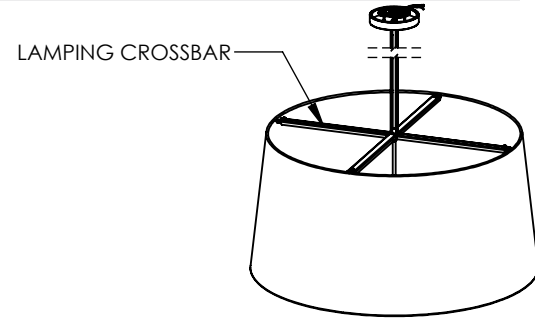

Caution:

***Be sure power is off at the main breaker box prior to installation.
Read all instructions in their entirety before beginning installation.***

1. Carefully unpack all components and make certain that everything is on hand.
2. Unscrew the Brass balls to release the Crossbar from canopy. Keep them for later.
3. Using Customer supplied hardware affix the Crossbar to J-box ensuring connection is suitable to hold minimum of 15Lbs and that Electrical Supply Wires remain accessible.
4. Take Running Thread and screw in the coupling attached to lamping crossbar, carefully running the Lead wires from fixture up the running thread.
5. Slide the Stem and check ring over running thread.
6. Pass the Running thread through canopy and secure canopy using supplied Hex nut and washer.
7. Following All Local Codes & Procedures make connection from fixture Lead wires to Supply Wires.
8. Carefully passing the canopy through Studs from Crossbar, secure Canopy using previous Brass Balls.
9. Install 4 x E26 T3 Spiral 26W bulbs (not included) into Sockets.
10. Take Fabric shade and attached to Crossbar using the supplied hardware.
11. Unscrew the finial attached to lamping crossbar, carefully pass the diffuser through the threaded pipe and make it rest on pegs on bottom of Fabric Shade.
12. Secure diffuser using the finial.
13. Power on and ENJOY!!

