
ASSEMBLY INSTRUCTIONS FOR #154167

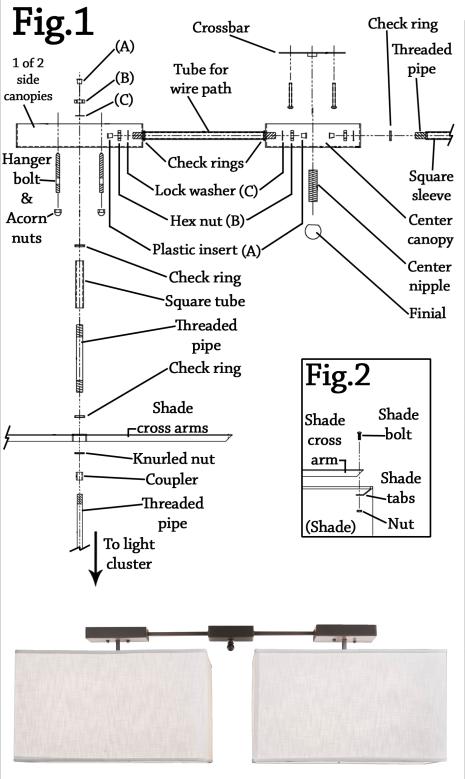

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1.) Assemble your canopies: The tube for wire path is made up of threaded pipe with a square sleeve. Insert threaded pipe into a check ring and then into the side of your side canopy. Inside the side canopy place lockwasher onto the pipe, and secure by screwing nut onto pipe finish with a plastic insert into pipe. Slide square sleeve onto threaded pipe and cap off with another check ring. Other side of threaded pipe is placed into center canopy and secured in the same manner as the other end (lock-washer, nut, plastic insert). Repeat this process for the other side canopy. (Fig.1)

2.) Assemble light cluster & shade arms: Take your electrical wire from light cluster and run it through the coupler, klurled nut, shade cross arms, and threaded pipe. Send threaded pipe through check ring, shade arms, and secure together by screwing knurled nut onto bottom of threaded pipe. Now screw the coupler onto the threaded pipe. Screw the threaded pipe /coupler onto the light cluster's threaded pipe. Slide square tube onto pipe above shade arms and cap off with check ring. Insert the top of pipe into center of canopy. Secure with lock-washer, nut, and place plastic insert into pipe. Repeat process for other shade. Run your electrical wires from side canopies through the wire path tubes into center canopy. (Fig.1)

3.)Attach shades to arms with nut and bolt, joined at the tip of cross arms and shade tabs.(Fig.2)

4.) Drive your hanger bolts into ceiling. Attach crossbar to ceiling. Be sure there is a nipple screwed into the crossbar ready to recieve canopy. Bring fixture to ceiling, connect all electrical wires as per your local electrical code. Slide center canopy up onto nipple while sliding side canopies onto the hanger bolts. Secure canopies flush to ceiling using finial (center) and canopy acorn nuts for the two side canopies.

5.)Bulb your fixture, (bulbs provided by others). Place diffusers. Power on, enjoy your new fixture!



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009 MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com