
NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

## **ASSEMBLY INSTRUCTIONS FOR #177524**

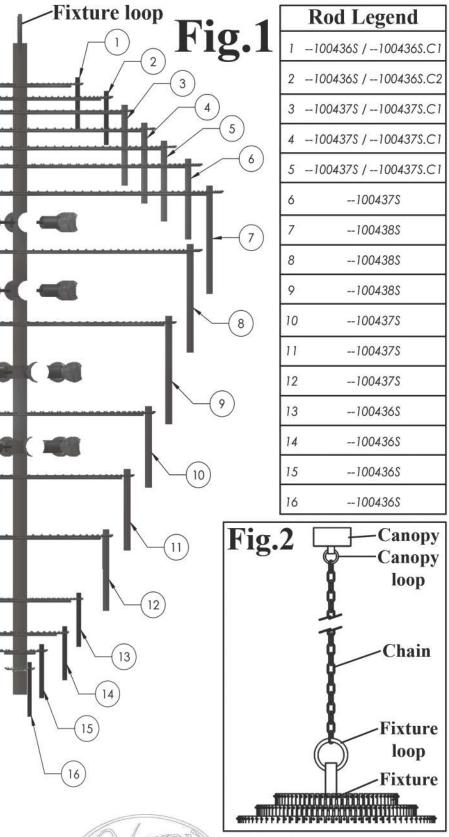

## **IMPORTANT**

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY, BULBS ARE NOT INCLUDED


1.)Attach the desired amount of chain to your fixture loop. Attach the other end of your chain to your canopy loop. (Fig.2) Bulb your fixture before rod placement.

2.)Run your electrical wire along with safety cable up the length of chain and into center of canopy. Attach canopy to your lift hardware. Connect the wires as per your local electrical code, and your lift directions.

3.)Begin your rod placement with the top tier (#1). As you go around the perimeter of tiers 1-5 you will eventually run into a support rod that will not accomodate the normal sized rod. When this happens you will use the ".C1" or ".C2" version of the same rod. For example when placing #1 tier you will use --100436S rod but when you need to use a shorter rod it will be --100436S.C1. (Fig1)

4.)As you complete each tier check that your rods are straight. Pegs were adjusted for best vertical hang before shipping. However, if needed, we have included a vertical adjustment pipe. Gently put the pipe onto the peg needing adjustment, and bend slightly up or down. Bending up will of course allow the bottom of rod to move out away from center of fixture. Bending down will do the opposite. Do not adjust if not needed. (Fig.3) 5.)Continue placing rods in order through tiers 1-6 and then complete tiers 16, 15, 14, and so on until you get to tier 7 (the last tier). (Fig.1)

6.) Power on, enjoy your beautiful new fixture!



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009 MONDAY - FRIDAY 8:00a.m - 6:00p.m ET visit us on the web at www.meyda.com