

# INSTALLATION INSTRUCTIONS

FOR ITEM 283183



**CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE.** We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.\*

**Caution:** Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

## FIXTURE COMPONENTS

1. CANOPY ASSEMBLY
2. RINGS (QTY: 3)
3. RGB WALL SWITCH

### ***Caution:***

***Fixture is OVERWEIGHT and not suitable for installation with standard Junction Box.***

***Be sure power is off at the main breaker box prior to installation.***

***Read all instructions in their entirety before beginning installation.***

1. Carefully unpack all components and make certain that everything is on hand.
2. Unscrew acorn nuts from canopy assembly to release mounting plate (save these for later).
3. Slide canopy down aircraft cables allowing it to rest on the first ring.
4. Using customer supplied hardware, affix mounting plate to blocking in ceiling ensuring that connection is suitable to hold a minimum of 50lbs and that electrical supply wires remain accessible.
5. Unwind the bundled aircraft cables between the rings starting from the bottom most ring to the top ring, slowly lowering the rings
6. Following all local codes and procedures, make electrical connections from fixture lead wires to supply wires.
7. Slide canopy up aircraft cables and screw the acorn nuts back on to secure canopy.
8. Fixture is RGB and dimmable, if desired connect to provided wireless RGB wall switch (Refer to wall switch installation instructions for installation details)
9. Power on and ENJOY!



# INSTALLATION INSTRUCTIONS


"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 9:00a.m - 5:00p.m ET

visit us on the web at [www.meyda.com](http://www.meyda.com)

REVISION:

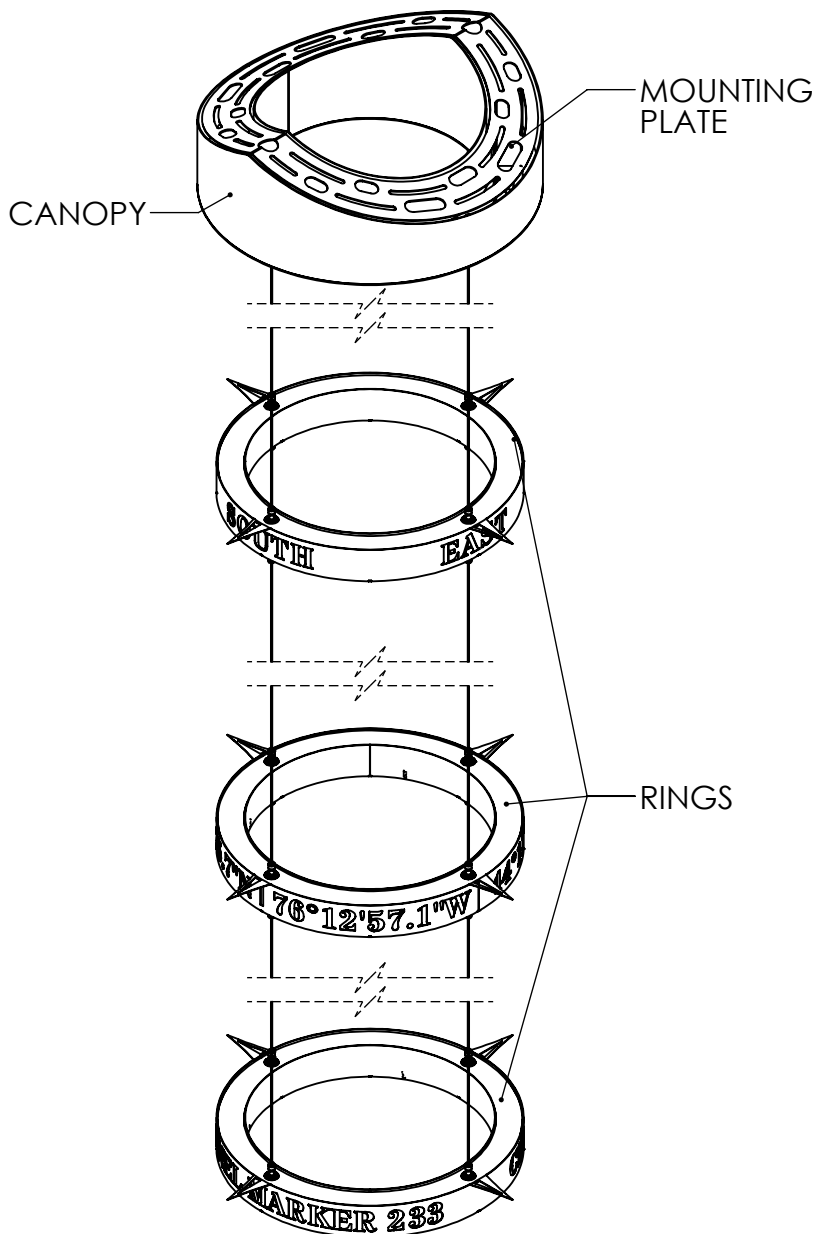

RGB WALL SWITCH



\*DIMENSIONS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION  
© MEYDA TIFFANY INC © DESIGN COPYRIGHT, MEYDA TIFFANY, INC. ALL RIGHTS RESERVED, NO UNAUTHORIZED DUPLICATION

\*TRANSPARENT FINISHES WILL VARY DEPENDING ON THE MATERIAL TO WHICH IT IS APPLIED AND THE FABRICATION TECHNIQUE.



ID# S27476-1501(283183)	BULB# INTEGRAL LED (BULBS NOT INCLUDED)	DATE:10/6/2025
CUST. DESIGN#	TYPE: RGB INTEGRAL LED STRIP	DRAWN BY:MZ 985
FIXTURE TYPE: PENDANT	WATTS:69	VOLTAGE:120
LENS COLOR:125724 STATUARIO IDALIGHT(NOT FROSTED)	TOTAL AMPS:0.575	SCALE: 1:10
METAL FINISH:FSC-5 VINTAGE COPPER (129933) / 3CKI BLACK CRACKED ICE (162682)	LOCATION: DAMP	APPROVAL:
MATERIAL:COPPER/ ACRYLIC	NOTES: DIMMABLE	EST. WEIGHT:38.76 LBS
		SHEET: 2 OF 2